
WWW.LOTOTOINDONESIA.COM









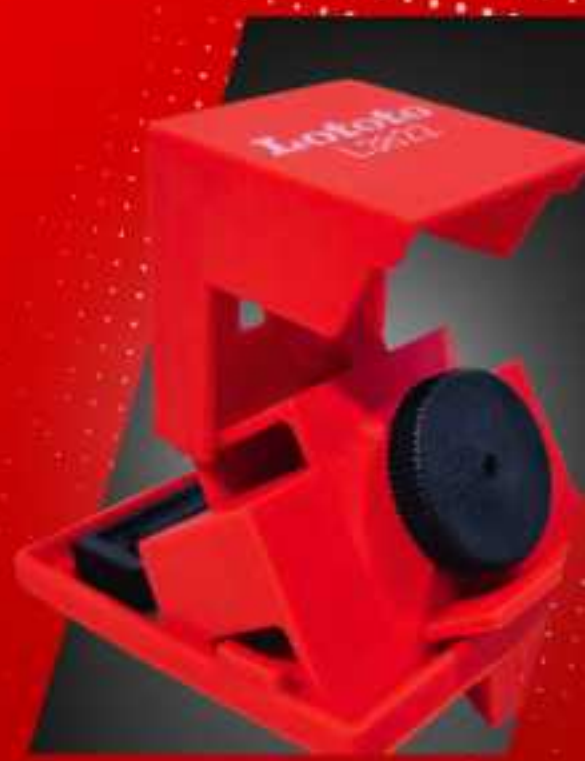



250+ PRODUCT

YOUR SAFETY LOCKOUT TAGOUT SOLUTIONS

Lototo 2024
Safety Lockout Tagout Indonesia

CATALOGUE

CONTENTS

TABLE OF CONTENTS

CATAGORY	PAGE
SAFETY PADLOCK	1
LOCKOUT HASP	7
CIRCUIT BREAKER	12
VALVE LOCKOUT	22
CABLE LOCKOUT	29
PNEUMATIC & ELECTRICAL LOCKOUT	33
LOCKOUT BOX & STATION	41
LOCKOUT TAG	49
COMPLETE SET	52
LOTO MODELLING & DOJO BOARD	57

Lototo

Safety Lockout Tagout Indonesia

SAFETY PADLOCK



LOTOTO SAFETY PADLOCK

SAFETY PADLOCKS SERVE TO LOCKOUT A SPECIFIC PIECE OF EQUIPMENT OR MACHINERY, OR EVEN AN ENTIRE AREA DURING PREVENTIVE MAINTENANCE OR REPAIR.

Lototo
Safety Lockout Tagout Indonesia

PADLOCK CLASSIFICATION

Different shackle materials and heights for your choice:



Different body shapes for your choice:



STRAIGHT EDGE PLASTIC LOCK BODY

A: ARC EDGE PLASTIC LOCK BODY

B: STRIPED PLASTIC LOCK BODY

WC: WIDTH PLASTIC LOCK BODY

WB: WIDTH STRIPED PLASTIC LOCK BODY

Different body colors for your choice:



RED	YELLOW	BLUE	DARK BLUE	GREEN	ORANGE	PURPLE	BROWN	BLACK	WHITE	GREY
MERAH	KUNING	BIRU	BIRU TUA	HIJAU	JINGGA	UNGU	COKLAT	HITAM	PUTIH	ABU

Lototo
Safety Lockout Tagout Indonesia

PADLOCK PROFILE CHART

Padlock Shackle:
- Steel Shackle
- Insulation Shackle
- Stainless Steel Shackle
- Cable Shackle



Padlock Body:
- Straight edge plastic lock body
- Arc edge plastic lock body: A
- Striped plastic lock body: B
- Width Striped plastic lock body: WB
- Width plastic lock body: WC

With rewritable warning labels

Dangerous label:
The language can be customized

Unique non-conductive lock cylinder:
The operation process is more secure by preventing electricity travelling from the shackle to the key.

Key Retaining Feature:
When the shackle is open, the key can not be removed.

FEATURES

- Reinforced nylon body, ensures the padlock strength and can't be deformed easily. The steel shackle padlock withstands temperature from -20°C to +120°C. The non-conductive shackle padlock withstands temperature from is made from -20°C to +120°C.
- Widely used in chemical, electrical, automobile industry, etc.
- With rewritable warning signs, other designs can be customized.
- Resistance of chemical, extreme temperatures, and UV rays.
- Key Retaining Feature: When the shackle is open, the key can't be removed.
- Laser printing, and logo engraving available if required.
- Several types of lock bodies and different colors available.

Lototo
Safety Lockout Tagout Indonesia

LABEL LANGUAGE





Customizable padlock shackles:



4mm Steel Shackle | 38mm Steel Shackle | 76mm Steel Shackle | 25mm Steel Shackle | Cable Shackle | 25mm Insulation Shackle | 38mm Insulation Shackle | 76mm Insulation Shackle

Different color key cover available:


*Normally key not have cover, if you want, we also can do for you.



RED	***YELLOW***	***BLUE***	***GREEN***	***ORANGE***	***PURPLE***	***BLACK***	***WHITE***	***GREY***
MERAH	KUNING	BIRU	HIJAU	ORANYE	UNGU	HITAM	PUTIH	ABU

Lototo
Safety Lockout Tagout Indonesia

KEY CHARTING SYSTEM

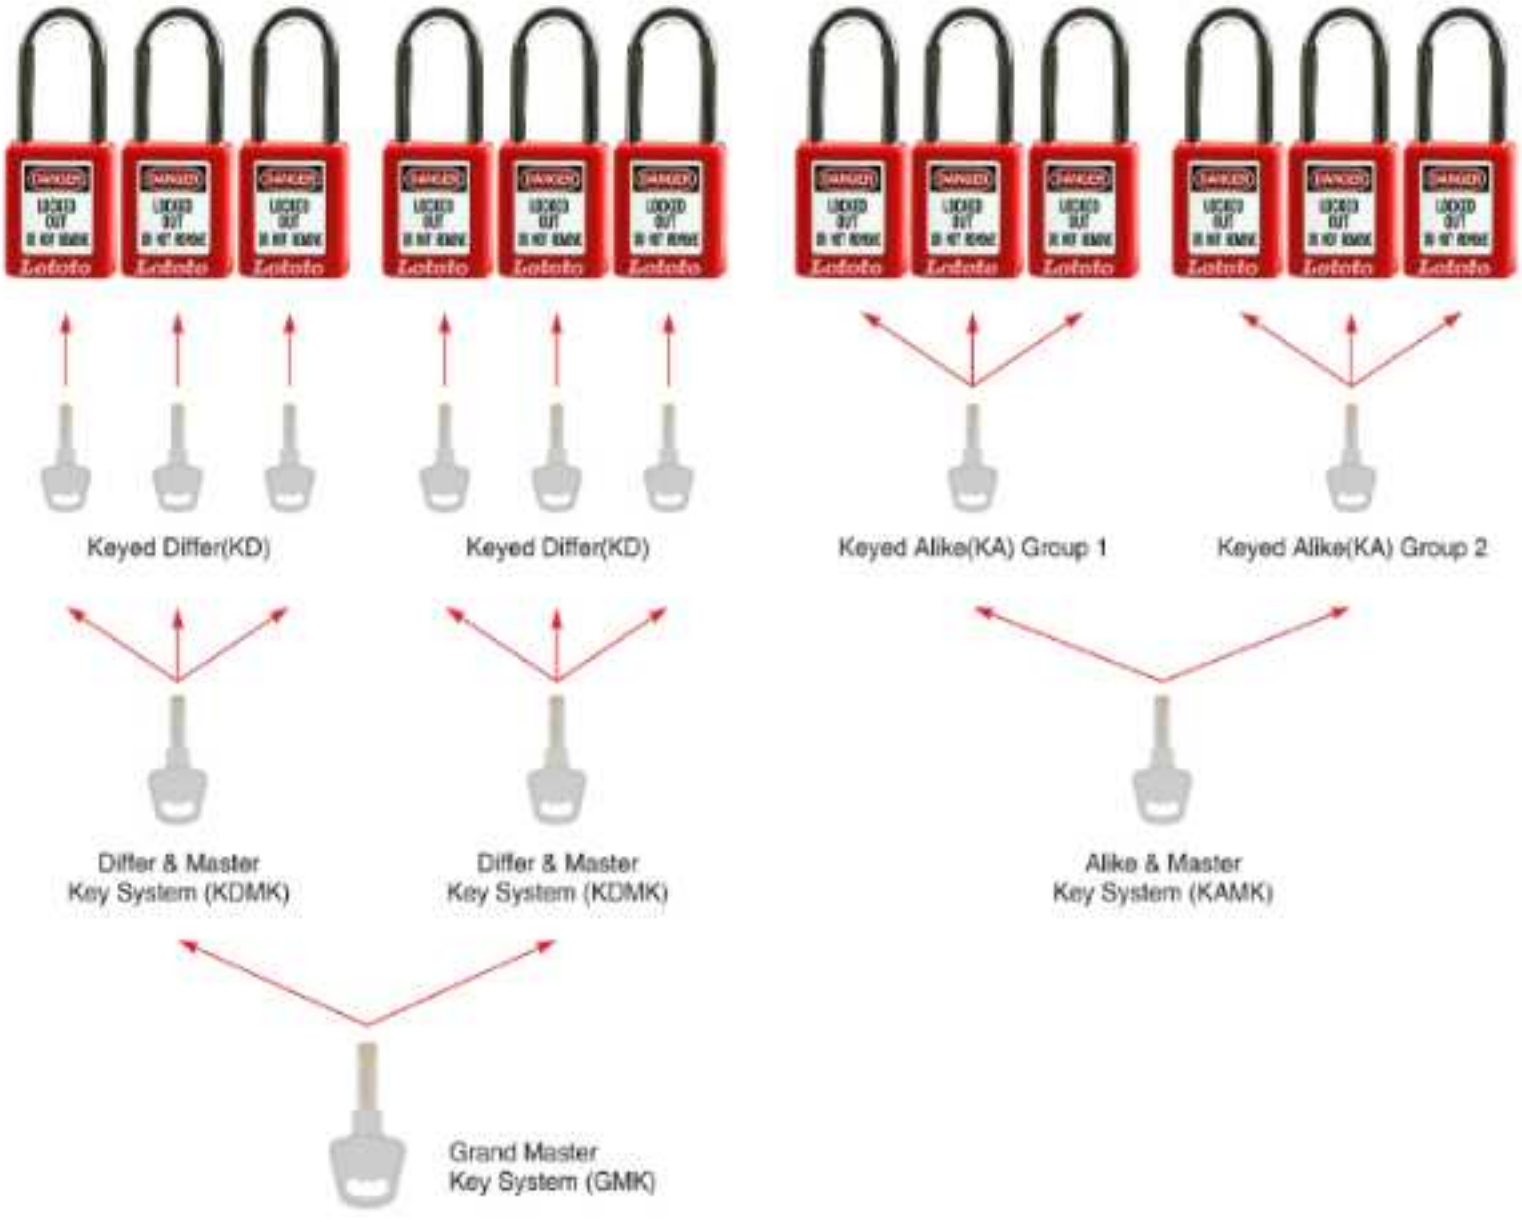

Key Charting System

- Keyed Differ System (KD): Each padlock is keyed differently, supplied with 1 key per lack. 50000pcs individual locks available.
- Keyed Alike System (KA): Each padlock is keyed the same in one group. 1 key will open all padlocks in each group.
- Differ & Master Key System (KDMK): Each paddock is keyed differently, supplied with 1 key per lock. A master key will override and open any of these padlocks.
- Alike & Master Key System (KAMK): Each padlock is keyed the same in one group. A master key will override and open all groups of Alike keyed.
- Grand Master Key System (GMK): Each padlock is keyed different in one group. A grand master key will override and open all different KDMK groups.

Key Charting Registration

- It is important that each employee at a site has a unique padlock key to help prevent duplicate keys from jeopardizing your lockout program. We promise to use different key and numbering for each order if required. Besides each key can be recorded in our programming system so that you can reorder the same key whenever necessary.

Lototo
Safety Lockout Tagout Indonesia

SAFETY PADLOCK



L410 L406

Part No	Description	Shackle Material	Specification
L410KARED	Keyed Alike	STEEL	KD : Each padlock is keyed different
L410RED	Keyed Differ		
L410MKRED	Master & Alike / Differ		KA : Each padlock is keyed the same in one group
L410GMKRED	Grand Master Key		
L406KARED	Keyed Alike	NYLON	
L406RED	Keyed Differ		
L406MKRED	Master & Alike / Differ		
L406GMKRED	Grand Master Key		

- Reinforced nylon body, withstand temperature from -20°C to +120°C. The non–conductive shackle is made from nylon, withstand temperature from -20°C to +120°C, ensuring the strength, and deformation fracture not easily.
- Key Retaining Feature: When the shackle is open, the key can't be removed.
- Laser printing and logo engraving available if required.
- All different colors available.
- Product Weight: L410 (108 gram), L406 (80 gram).

SAFETY PADLOCK


Part No	Description	Shackle Material	Specification
L410LTKARED	Keyed Alike	STEEL	KD : Each padlock is keyed different
L410LTRED	Keyed Differ		
L410LTMKRED	Master & Alike / Differ		KA : Each padlock is keyed the same in one group
L410LTGMKRED	Grand Master Key		
L406LTKARED	Keyed Alike	NYLON	
L406LTRED	Keyed Differ		
L406LTMKRED	Master & Alike / Differ		
L406LTGMKRED	Grand Master Key		



L410LT L406LT

- Reinforced nylon body, withstand temperature from -20°C to +120°C. The non–conductive shackle is made from nylon, withstand temperature from -20°C to +120°C, ensuring the strength, and deformation fracture not easily.
- Key Retaining Feature: When the shackle is open, the key can't be removed.
- Laser printing and logo engraving available if required.
- All different colors available.
- Product Weight: L410LT (135 gram), L406LT (95 gram).

GENERAL PADLOCK

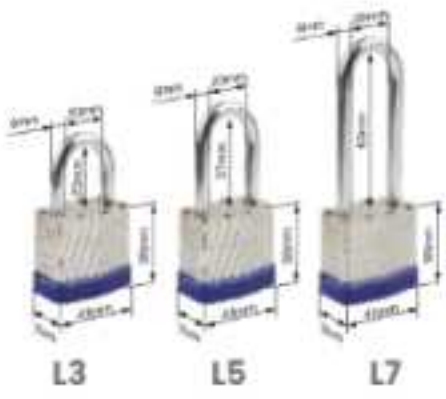

L3 L5 L7

Part No	Description	Shackle Diameter	Shackle Height
L3	Keyed Alike	6mm	23mm
L5	Keyed Differ	6mm	37mm
L7	Master Key	6mm	63mm

- Made from hardened steel with more durable brass cylinder, anti-cutting, and anti-sawing.
- With a plastic cover in the bottom, normally in blue.
- Keyed different, keyed alike available.
- Other lock width and shackle length also available.
- Other size and colour can customized.
- Product Weight: L3 (38 gram), L5 (45 gram), L7 (58 gram).

Lototo
Safety Lockout Tagout Indonesia

SAFETY PADLOCK



LS31 LS32

Part No	Description	Shackle Material	Specification
LS31KARED	Keyed Alike	STEEL	KD : Each padlock is keyed different
LS31RED	Keyed Differ		
LS31MKRED	Master & Alike / Differ		KA : Each padlock is keyed the same in one group
LS31GMKRED	Grand Master Key		
LS32KARED	Keyed Alike	NYLON	
LS32RED	Keyed Differ		
LS32MKRED	Master & Alike / Differ		
LS32GMKRED	Grand Master Key		

- Reinforced nylon body, withstand temperature from -20°C to +120°C. The non—conductive shackle is made from nylon, withstand temperature from -20°C to +120°C, ensuring the strength, and deformation fracture not easily.
- Key Retaining Feature: When the shackle is open, the key can't be removed.
- Laser printing and logo engraving available if required. All different colors available.
- Product Weight: LS31 (95 gram), LS32 (79 gram).

SAFETY PADLOCK CABLE SHACKLE

Part No	Description	Shackle Material	Specification
LS410KARED	Keyed Alike	STAINLESS STEEL CABLE	KD : Each padlock is keyed different
LS410RED	Keyed Differ		
LS410MKRED	Master & Alike / Differ		KA : Each padlock is keyed the same in one group
LS410GMKRED	Grand Master Key		
LS410SKARED	Keyed Alike	STAINLESS STEEL CABLE	
LS410SRED	Keyed Differ		
LS410SMKRED	Master & Alike / Differ		
LS410SGMKRED	Grand Master Key		



LS410 LS410S

- Reinforced nylon body, withstand temperature from —20°C to +120°C. The cable shackle is made from stainless steel, ensuring the strength, and can't be deformed easily.
- Key Retaining Feature: When the shackle is open, the key can't be removed.
- Laser printing and logo engraving available if required.
- Other cable lengthts can be customized. All different colors available.

GENERAL PADLOCK



L1105 L1106

Part No	Description	Shackle Material	Specification
L1105KARED	Keyed Alike	STEEL	Inner shackle: 20mm; Diameter: 4.6mm
L1105RED	Keyed Differ		
L1105MKRED	Master & Alike / Differ		
L1105GMKRED	Grand Master Key		
L1106KARED	Keyed Alike	STEEL	Inner shackle: 81mm; Diameter: 4mm
L1106RED	Keyed Differ		
L1106MKRED	Master & Alike / Differ		
L1106GMKRED	Grand Master Key		

- Alumunium body and triple-coated hardened chrome plated steel shackle.
- When unlocking the padlock, the shackle will pop up automatically.
- Shackle lenghth : 25mm, 38mm, 76mm. Other shackle lengths can be customized.
- Product Weight: L1105 (45 gram), L1106 (45 gram).

Lototo

Safety Lockout Tagout Indonesia

LOCKOUT HASP




LOTOTO SAFETY HASP

LOCKOUT HASPS ARE A VALUABLE AND CONVENIENT WAY TO LOCKOUT AN ENERGY SOURCE ENSURING THAT YOUR WORKER'S SAFETY IS NEVER COMPROMIZED. OUR HASPS ARE AVAILABLE IN A VARIETY OF HIGHLY VISIBLE, LABELED AND NON-CONDUCTIVE OPTIONS. THEY ARE IDEAL FOR GROUP LOCKOUT PROCEDURES, AND WILL HELP GIVE YOUR TEAM THE PIECE OF MIND THAT ENERGY SOURCE IS PROPERLY ISOLATED.

Lototo
Safety Lockout Tagout Indonesia

STEEL LOCKOUT HASP

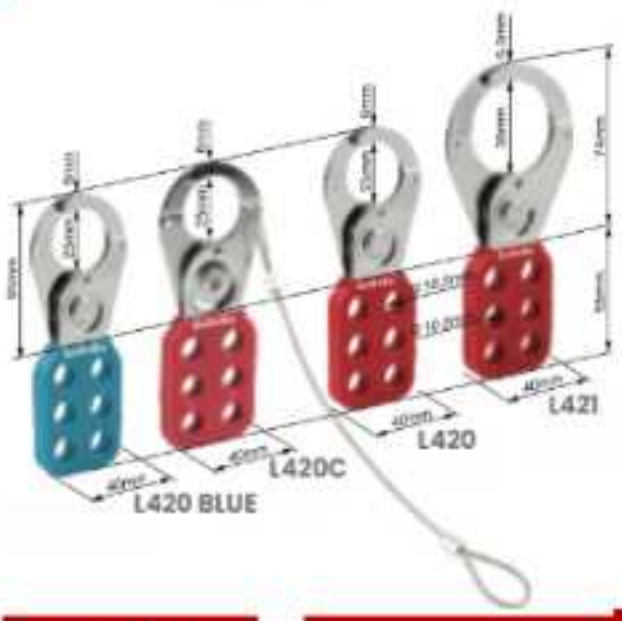


Part No	Description
L420	Jaw Size 1"(25mm), accept up to 6 padlocks.
L420C	With 20cm length cable. (Cable Length OEM available)
L421	Jaw Size 1.5"(38mm), accept up to 6 padlocks.

- Handle is made from PA, and lock shackle is made from nickel plated steel with red plastic or vinyl coated body, rust proof.
- Allow multiple padlocks to be used when isolating one energy source.
- Lock holes: 10.5mm in diameter.
- Jaw size: 1"(25mm) & 1.5"(38mm).
- Product weight: L420 (103 gram), L421 (113 gram).


STEEL LOCKOUT HASP

Part No	Description
L420P	Jaw Size 1"(25mm), accept up to 6 padlocks.
L421P	Jaw Size 1.5"(38mm), accept up to 6 padlocks.

- Made from Engineering plastic nylon PA injection molding, galvanized rustproff surface.
- Allow multiple padlocks to be used when isolating one energy source.
- Lock holes: 10.5mm in diameter.
- Jaw size: 1"(25mm) & 1.5"(38mm).

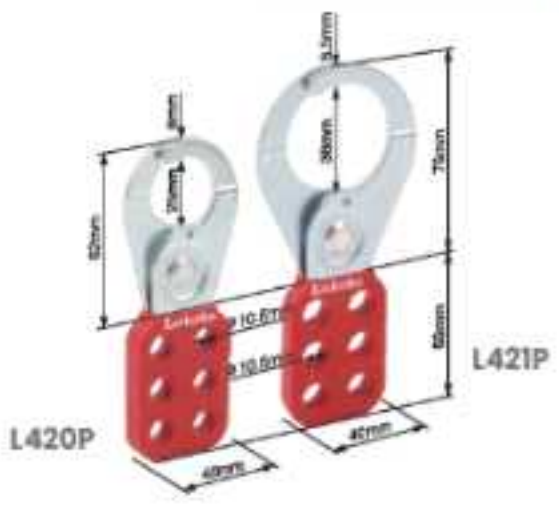

STEEL LOCKOUT HASP WITH HOOK

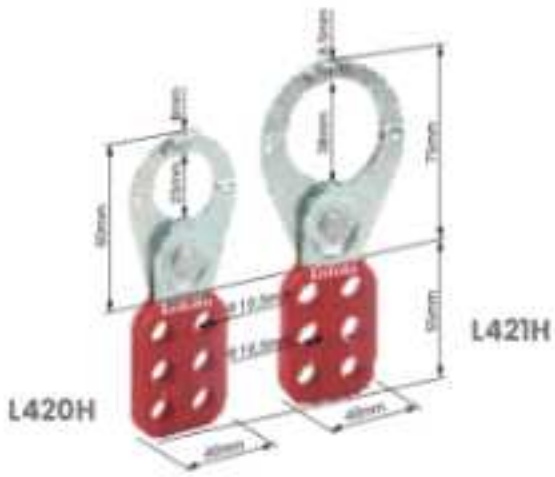


Part No	Description
L420H	Jaw Size 1"(25mm), accept up to 6 padlocks.
L421H	Jaw Size 1.5"(38mm), accept up to 6 padlocks.

- Handle is made from PA and lock shackle is made from nickel plated steel with red plastic or vinyl coated body, rust proof.
- Allow multiple padlocks to be used when isolating one energy source.
- Lock holes: 10.5mm in diameter.
- Jaw size: 1"(25mm) & 1.5"(38mm).
- Product weight: L420H (103 gram), L421H (113 gram).

Part No	Description
L420HP	Jaw Size 1"(25mm), with hook accept up to 6 padlocks.
L421HP	Jaw Size 1.5"(38mm), with hook accept up to 6 padlocks.


- Made from Engineering plastic nylon PA injection molding, galvanized rustproff surface.
- Allow multiple padlocks to be used when isolating one energy source.
- Steel lockout hasp includes tamper-proff interlocking tabs to prevent unauthorized opening.
- Lock holes: 10.5mm in diameter.
- Jaw size: 1"(25mm) & 1.5"(38mm).
- Product weight: L420HP (10gram)

STEEL LOCKOUT HASP WITH HOOK

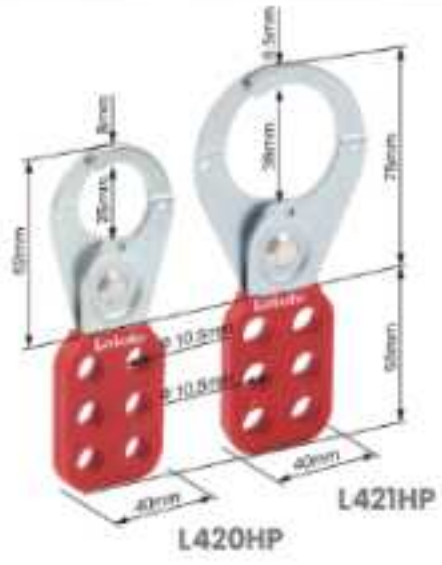

Lototo
Safety Lockout Tagout Indonesia

ECONOMIC STEEL LOCKOUT HASP

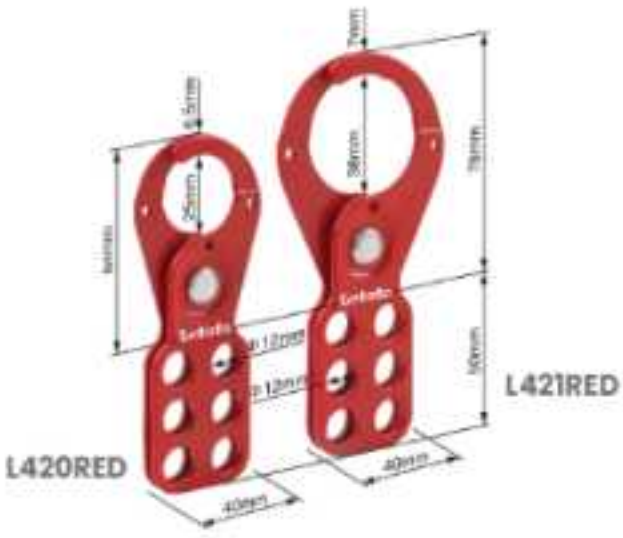


Part No	Description
L420RED	Jaw Size 1"(25mm), accept up to 6 padlocks.
L421RED	Jaw Size 1.5"(38mm), accept up to 6 padlocks.

- Made from durable steel with red plastic or vinyl coated body, rust proof.
- Can be locked out by multiple workers on a single energy point, by attaching devices on the equipment.
- Lock holes: 12mm in diameter.
- Jaw size: 1"(25mm) & 1.5"(38mm).
- Product weight: L420RED (92 gram), L421RED (105 gram).


ECONOMIC STEEL LOCKOUT HASP WITH HOOK

Part No	Description
L420HRED	Jaw Size 1"(25mm), accept up to 6 padlocks.
L421HRED	Jaw Size 1.5"(38mm), accept up to 6 padlocks.

- Made from hardener powder coated steel, durable and resist rust.
- It has a double locking arrangement, hooks on jaws prevent them to be pulled apart.
- Lock holes: 12mm in diameter.
- Jaw size: 1"(25mm) & 1.5"(38mm).
- Product weight: L420HRED (92 gram), L421HRED (110 gram).

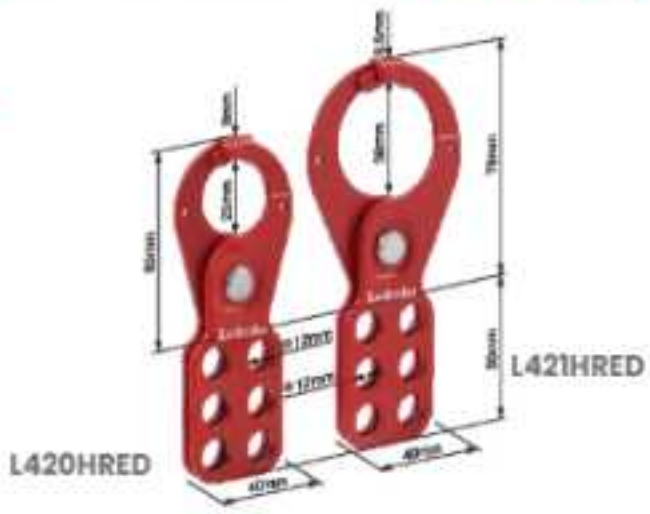

DOUBLE-END STEEL LOCKOUT HASP

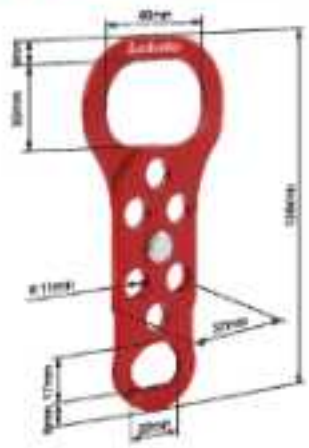

Part No	Description
L429RED	Head shackle size: 46mm x 30mm Tail shackle size: 22mm x 17mm, Length: 136mm

- Made from sprayed steel.
- Allow multiple padlocks to be used when isolating one energy source.
- Lock holes: 11mm in diameter.
- Overal length: 136mm, with 22mm, and 41mm jaws.

NYLON LOCKOUT HASP


Part No	Description
L428	Overal size: 43.5 x 175mm, accept up to 6 padlock.

- Made from durable nylon.
- Non-conductive body, applied to electric power isolation with high requirements on corrosive and explosion-proof places.
- Allow multiple padlocks to be used when isolating one energy source.
- Labels can be customized.
- Product weight: L428 (25 gram).



Lototo
Safety Lockout Tagout Indonesia

NYLON LOCKOUT HASP

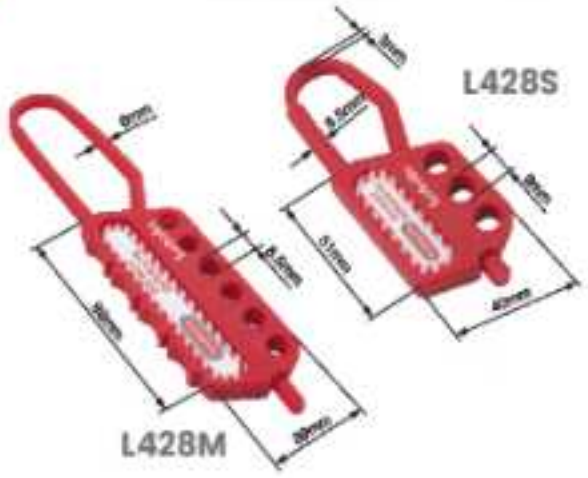

Part No	Description
L428M	Overall size: 39mm x 190mm, accept up to 6 padlocks.
L428S	Overall size: 40mm x 115mm, accept up to 3 padlocks.

- Made from PA.
- Non-conductive body, applied to electric power isolation with high requirements on corrosive or explosion-proof places.
- Allow multiple padlocks to be used when isolating one energy source.


NYLON LOCKOUT HASP

Part No	Description
LS430P	Overall size: 61mm x 107mm, accept up to 4 padlocks.
LS431P	Overall size: 61mm x 108mm, accept up to 4 padlocks.

- Made from Nylon.
- Non-conductive body, applied to electric power isolation with high requirements on corrosive or explosion-proof places.
- With 3mm or 6mm shackle diameter available.
- Product weight: LS430P (33 gram), LS431P (78 gram)



ALUMUNIUM LOCKOUT HASP

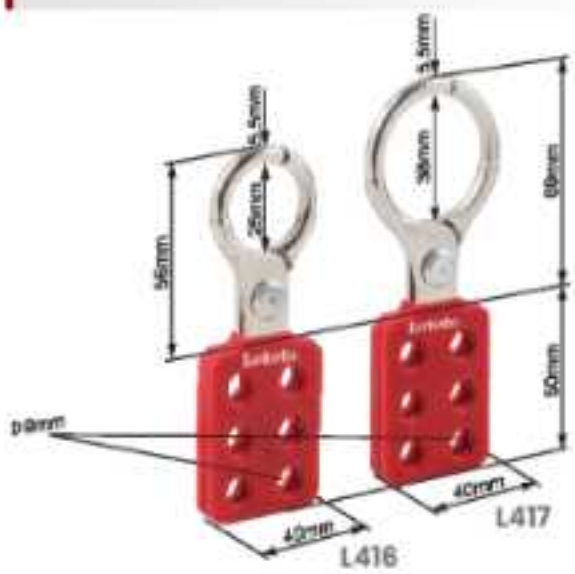

Part No	Description
L416	Jaw size: 1"(25mm), accept up to 6 padlocks
L417	Jaw size: 1.5"(38mm), accept up to 6 padlocks.

- Made from surface treated and spark proof alumunium shackle with red nylon coated body.
- Allow multiple padlocks to be used when isolating one energy source.
- Lock holes: 10mm in diameter.
- Jaw size: 1"(25mm) & 1.5"(38mm)
- Product weight: L416 (48 gram), L417 (52 gram).

ALUMUNIUM LOCKOUT HASP

Part No	Description
L427	Overall size: 75mm x 189mm, accept up to 8 padlocks.

- Made from anodized alumunium alloy.
- With tamper-proof locking tabs, allowing multiple padlocks to be used when isolating one energy source.
- With a high visibility, re-usable write-on safety label, accepts pencil, pen or marker for repeated use.
- Label an color can be custom made.
- Product weight: L427B (51 gram)



Lototo
Safety Lockout Tagout Indonesia

ALUMUNIUM LOCKOUT HASP



L427ML


Part No	Description
L427ML	Overall size: 73mm x 178mm

- Spring type bayonet, more convenient to use.
- The main body is anodized alumunium, and the inside is made of stainless steel, which is more corrosion-resistant.
- Multi-manager.
- Handwritten security label.
- Product weight: L427 (144 gram).

Part No	Description
L429	Head shackle size: 38mm, Tail shackle size: 25mm, Length: 150mm

- Made from alumunium with surface treatment, spark proof.
- Allow multiple padlocks to be used when isolating one energy source.
- Colors can be custom made.
- Logo printing by laser available.
- Product weight: 90 gram

DOUBLE-END ALUMUNIUM LOCKOUT HASP

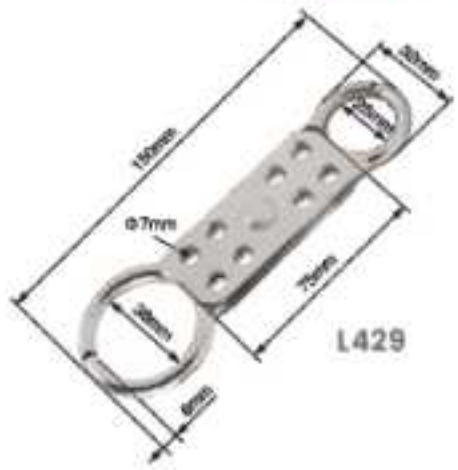

BUTTERFLY LOCKOUT HASP




Part No	Description
LS430	The 4mm steel hasp fits smaller lockout points.

- Steel Hasp with Red Plactic Handle.
- The 4mm steel hasp fits smaller lockout points.

Part No	Description
L419	Overall size: 59mm x 176mm, Shackle size: 86mm.

- Made from hardened heavy duty steel with rust proof coated.
- Allow multiple padlocks to be used when isolating one energy source.
- Keep equipment inoperative while under repairing or adjusting.

BUTTERFLY LOCKOUT HASP

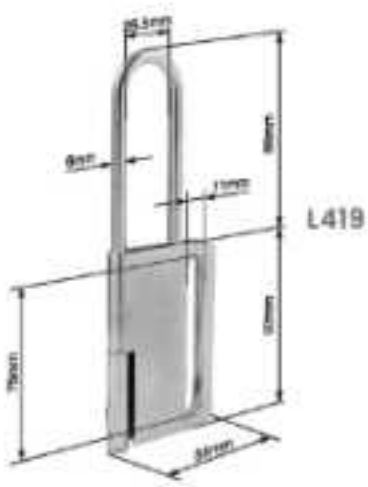

Lototo
Safety Lockout Tagout Indonesia

BUTTERFLY LOCKOUT HASP




Part No	Description
L418	Overal size: 58mm x 114mm

- Made of hard steel plate, the surface of the lock body is treated by high temperature spraying.
- Multiple lockout methods.
- Easily manage multiple people together.
- Suitable for chemical industry, machinery manufacturing, electric power and energy industry, etc.


HOLE SLIDING SAFETY HASP

Part No	Description
LS440	Accept up to 12 padlocks.
LS450	Accept up to 24 padlocks.

- Anodized alumunium finish for superior corrosion resistance.
- Keeps equipment inoperative while repairs or adjustments are made.
- Control cannot be turned on untill last worker's padlock is removed from Hasp.
- Offset lockout holes ensure hasp cannot be locked in open position.

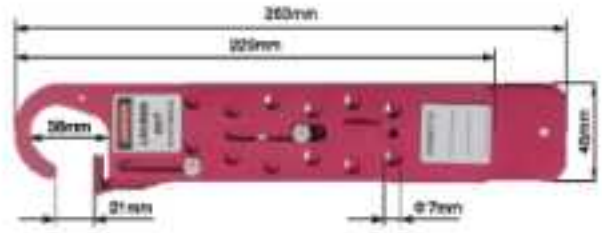

LS440

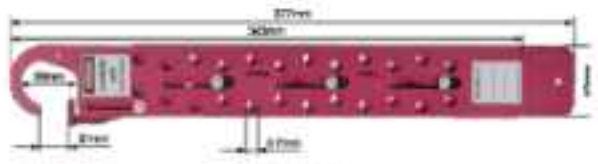

LS450

Lototo
Safety Lockout Tagout Indonesia

CIRCUIT BREAKER LOCKOUT



LOTOTO CIRCUIT BREAKER LOCKOUT

OUR CIRCUIT BREAKER LOCKOUTS WILL ISOLATE AND SECURE JUST ABOUT ANY CIRCUIT BREAKER. SNAP-ON AND CLAMP-ON OPTIONS ARE AVAILABLE AND WILL COVER MOST BREAKERS. OVERSIZED CLAMP-ON AND UNIVERSAL MULTI-POLE DEVICES ARE ALSO AVAILABLE.

Lototo
Safety Lockout Tagout Indonesia

CIRCUIT BREAKER LOCKOUT



LS3390 LS3390A

Part No	Description
LS3390	Max clamping 9mm
LS3390A	Max clamping 6.7mm






- Made from Alumunium Alloy.
- First most existing existing types of european and asia circuit breaker.
- Fits on breaker toggles and can be tightened with a screw driver.
- Can take a padlock with shackle diameter up to 8.5mm.
- Available for single and multi-pole breakers.
- Color OEM available.

Part No	Description
LS2396	Hole diameter: 8mm




- The lock body is made of standard A3 steel plate, with high temperature spray surface treatment.
- Slide left and right, adjust the card head in two gears.
- Suitable for multi-lock management.
- Designed to lock Schneider medium and large plastic case circuit breakers in the closed state.
- Product weight: 33gram

CIRCUIT BREAKER LOCKOUT

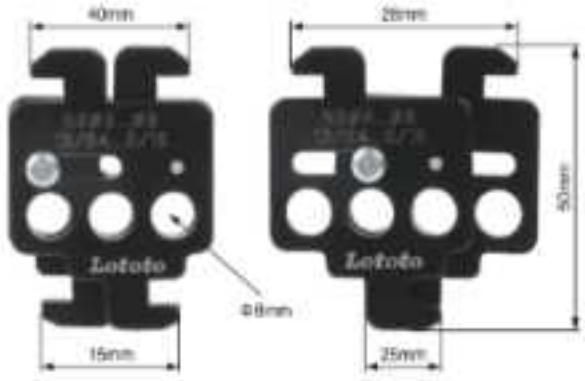

LS2396

CIRCUIT BREAKER LOCKOUT

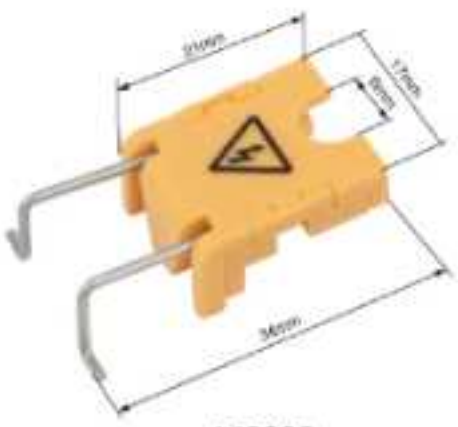

LS2398

Part No	Description
LS2398	Can take padlocks with a shackle diameter up to 4mm.





- Made from engineering plastic.
- Applied for most existing types of European and Asian circuit breakers.
- Suggested to be equipped together with a padlock for added safety.
- Easily installed, no tools needed.
- Available for single and multi-pole breakers.

Lototo
Safety Lockout Tagout Indonesia

CIRCUIT BREAKER LOCKOUT



Part No	Description
LS3395	Lock Mini Circuit Breaker (MCB)
LS3396	Lock Molded Case Circuit Breaker (MCCB)






- Made from rugged reinforced nylon and chrome plated brass screw.
- Comes with locking screw, can lock conveniently by itself without tools.
- Lock out different types of circuit breakers.
- Product weight: LS3396 (25gram)

Part No	Description
LS2397	Suitable for locking Schneider circuit breaker



- Made from durable ABS.
- Easilly installed, no tools needed.
- Can take a padlock with shackle diameter up to 6mm.
- Product weight: 2gram

CIRCUIT BREAKER LOCKOUT

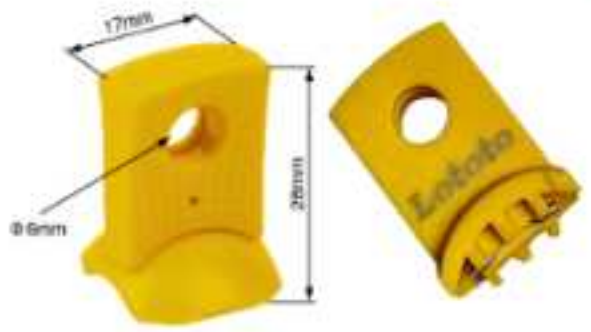

LS2397

MINIATURE CIRCUIT BREAKER LOCKOUT



LS2393

Part No	Description
LS2393	Pin out wide, 2 holes required, fit more than 63amp MCB






- Made from engineering plastic strengthened nylon PA.
- Applied for most existing types of European and Asian circuit breakers.
- Suggest to be equipped together with a padlock for added safety.
- Easily installed, no tools needed.
- Can take a padlock for single and multi-pole breakers.
- Available for single and multi-pole breakers.
- Product weight: 7gram

Lototo
Safety Lockout Tagout Indonesia

MINIATURE CIRCUIT BREAKER LOCKOUT

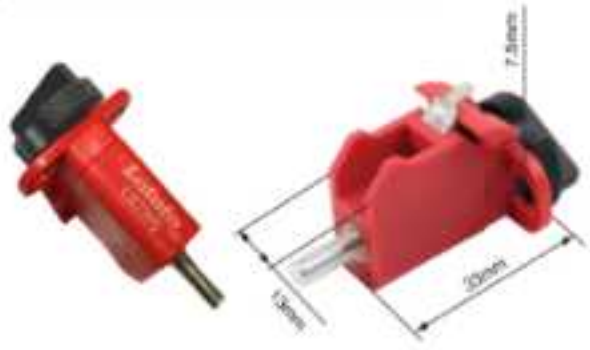

LS2395

Part No	Description
LS2395	Tie bar lockout, no hole in breakers required. Suit more than 2P MCB, only can lock off position MCB





- Made from engineering plastic strengthened nylon PA.
- Applied for most existing types of European and Asian circuit breakers.
- Suggest to be equipped together with a padlock.
- Easily installed, no tools needed.
- Can take a padlock with shackle diameter up to 9/32" (7.5mm).
- Available for multi-pole breakers.
- Product weight: 20 gram

Part No	Description
LS2390	Pin out standard, 2 holes required, fit up to 60Amp.



- Made from engineering plastic strengthened nylon PA.
- Applied for most existing types of European and Asian circuit breakers.
- Suggest to be equipped together with a padlock.
- Easily installed, no tools needed.
- Can take a padlock with shackle diameter up to 9/32" (7.5mm).
- Available for single and multi-pole breakers.
- Product weight: 7 gram

MINIATURE CIRCUIT BREAKER LOCKOUT



LS2390

MINIATURE CIRCUIT BREAKER LOCKOUT



LS2391

Part No	Description
LS2391	Pin in standard, 2 holes required, fit up to 60Amp. Better to lock 1P MCB



- Made from engineering plastic strengthened nylon PA.
- Applied for most existing types of European and Asian circuit breakers.
- Suggest to be equipped together with a padlock.
- Easily installed, no tools needed.
- Can take a padlock with shackle diameter up to 9/32" (7.5mm).
- Available for single and multi-pole breakers.
- Product weight: 7 gram

Lototo
Safety Lockout Tagout Indonesia

MOULDED CASE CIRCUIT BREAKER LOCKOUT



Part No	Description
LS3393A	Size: 45mm x 25mm x 10mm, max clamping 7.5mm, need a small screw driver to install.
LS3393	Size: 45mm x 25mm x10mm, max clamping 7.5mm. without installing tools needed.



- Made from engineering plastic strengthened nylon PA.
- Lock out different types of circuit breakers.
- Product weight: LS3393A (2 gram), LS3393 (2 gram)

MOULDED CIRCUIT BREAKER LOCKOUT

Part No	Description
L3391B	Size: 51mm x 25mm x 23mm, max clamping 10mm, need a small screw driver to install.
L3391A	Size: 51mm x 25mm x 23mm, max clamping 10mm. without installing tools needed.
L3391	Size: 51mm x 25mm x 23mm, max clamping 10mm. without installing tools needed.



- Made from engineering plastic strengthened nylon PA.
- Lock out different types of circuit breakers.
- Product weight: L3391A (5 gram), L3391 (6 gram), L3391B (17 gram)



MOULDED CASE CIRCUIT BREAKER LOCKOUT

Part No	Description
L3392A	Hole diameter 8.5mm, need a small screw driver to install.
L3392	Hole diameter 8.5mm, without installing tools needed.





- Made from engineering plastic strengthened nylon PA.
- Lock out different types of circuit breakers.

Lototo
Safety Lockout Tagout Indonesia

MOULDED CASE CIRCUIT BREAKER LOCKOUT



Part No	Description
L4395	7mm ≤ a ≤ 15mm



- Made from durable ABS.
- Self-locking screws, easy to lock without tools.
- Wide range of uses: suitable for all kinds of miniature circuit breakers (handle width ≤ 15mm).
- Product weight: 28 gram

LARGE MOULDED CASE CIRCUIT BREAKER LOCKOUT

Part No	Description
L3394A	Size: 125mm x 63mm x 40mm, max clamping 10mm, need a small screw driver to install.
L3394	Size: 125mm x 63mm x 40mm, max clamping 10mm. without installing tools needed.



- Made from engineering plastic strengthened nylon PA.
- Lock out different types of circuit breakers.
- Can take padlock with shackle diameter up to 10mm.
- Product weight: L3394 (60 gram)



GRIP TIGHT CIRCUIT BREAKER LOCKOUT



Part No	Material	Description
L493B	ABS	Max clamping 12mm
L493BR	METAL	Max clamping 12mm
L493BB	METAL	Max clamping 12mm





- Material: L493B made from rugged ABS. L493BR, L493BB made from die-cast alumunium alloy & nylon & ABS. The surface sprays metal.
- Applied size: accepts look shackles up to 9/32"(7.5mm) in diameter.
- Usage: large circuit breaker lockout are easy to install using patented thumbscrew design-no screwdrivers needle.
- Widely used, suitable for small and medium sized circuit breaker (handle width less than 12mm).
- Simply tighten lockouts securely onto switch tongue, pull cover over thumb screw and lock cover to prevent clamp from being loosened.
- Product weight: L493B (13 gram)

Lototo
Safety Lockout Tagout Indonesia

GRIP TIGHT CIRCUIT BREAKER LOCKOUT



Part No	Description
LS2394	Max clamping 10mm





- Made from durable ABS.
- Compact size allows for locking out adjacent breakers. Suitable for locking out multi-pole breakers and works with the most tie-bar toggles.
- Comes with a locking screw, you can easily lock without using other locking tools. Slotting allows screwdriver adjustment.
- Can take a padlock with shackle diameter up to 9.3mm.
- Product weight: 20 gram

Part No	Description
LS4392A	Hole diameter 8mm, need a small screw driver to install.
LS4392	Hole diameter 8mm, without installing tools needed.

- Made from engineering plastic strengthened nylon PA.
- Lock out different types of circuit breakers.
- Product weight: LS4392 (10 gram)

MOULDED CIRCUIT BREAKER LOCKOUT





GRIP TIGHT CIRCUIT BREAKER LOCKOUT



Part No	Material	Description
L491B	ABS	Max clamping 16mm
L491BR	METAL	Max clamping 16mm
L491BB	METAL	Max clamping 16mm





- Material: L491B made from rugged ABS. L491BR, L491BB made from die-cast alumunium alloy & nylon & ABS. The surface sprays metal.
- Applied size: accepts look shackles up to 9/32"(7.5mm) in diameter.
- Usage: large circuit breaker lockout are easy to install using patented thumbscrew design-no screwdrivers needle.
- Widely used, suitable for small and medium sized circuit breaker (handle width less than 16mm).
- Simply tighten lockouts securely onto switch tongue, pull cover over thumb screw and lock cover to prevent clamp from being loosened.
- Product weight: L491B (30 gram)

Lototo
Safety Lockout Tagout Indonesia

MULTI-FUNCTIONAL CIRCUIT BREAKER LOCKOUT



LS4391

Part No	Description
LS4391	Suitable for mini-size circuit breaker handle width ≤ 9mm, and middle size circuit breaker handle width ≤ 12mm.





- Made from engineering plastic strengthened nylon PA.
- Fits on breaker toggles and can be tightened with a screw driver.
- With two toggles can be applied on different sizes of breakers.
- Can take a padlock with shackle diameter up to 9.3mm.
- Product weight: 12 gram

Part No	Description
LS4390	Accept up to 1 padlock with shackle diameter ≤ 10mm.





- Made from engineering plastic strengthened nylon PA and brass screw.
- Self-locking screws, easy to lock without tools.
- Wide range of uses: suitable for all kinds of small and medium sized MCCBs, and any miniature circuit breakers (handle width ≤ 15mm)

MULTI-FUNCTIONAL CIRCUIT BREAKER LOCKOUT



LS4390

CLAMP-ON CIRCUIT BREAKER LOCKOUT



Part No	Description
L3821	For 120-227V breaker lockouts, handle width ≤ 16.5mm
L3821-2	Part L321



- Made of rugged polypropylene and impact modified nylon.
- Can be used with lockout cleats in the bottom for hard locking long sliding switches and switches with large angular rotation.
- Can be easily operated with any tools.
- Accepts lock shackles up to 9/32" (7.5mm) in diameter.
- Product weight: 8 gram

Lototo
Safety Lockout Tagout Indonesia

CLAMP-ON CIRCUIT BREAKER LOCKOUT



Part No	Description
L3822	For 480-600V breaker lockouts, handle width ≤ 41mm.
L3822-2	Part L3822-2



- Made of rugged polypropylene and impact modified nylon.
- Can be used with lockout cleats in the bottom for hard locking long sliding switches and switches with large angular rotation.
- Can be easily operated with any tools.
- Accepts lock shackles up to 9/32" (7.5mm) in diameter.
- Product weight: 55 gram

Part No	Description
L3823	For large 480-600V breaker lockouts, handle width ≤ 70mm.





- Made of rugged polypropylene and impact modified nylon.
- Can be used with lockout cleats in the bottom for hard locking long sliding switches and switches with large angular rotation.
- Can be easily operated with any tools.
- Accepts lock shackles up to 9/32" (7.5mm) in diameter.
- Product weight: 48 gram

CLAMP-ON CIRCUIT BREAKER LOCKOUT



L3823

MOTOR PROTECTION CIRCUIT BREAKER LOCKOUT


LSD100


LSD110

Part No	A	L	W	H
LSD100	46mm	78mm	29.5mm	35mm
LSD110	50mm	96mm	28mm	47mm






- Made from strong and durable strengthened nylon.
- Keyhole diameter less than 8.6mm.
- Suit for Motor Protection Circuit Breaker (MPCB).
- Product weight: LSD110 (25gram), LSD100 (20gram)

Lototo
Safety Lockout Tagout Indonesia

SNAP-ON CIRCUIT BREAKER LOCKOUT

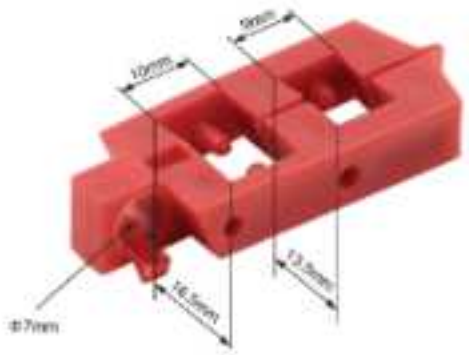

L492B

Part No	Description
L492B	For 120V circuit breakers which have holes in the switch tongue.



- Made from engineering plastic strengthened nylon PP
- For 120V circuit breakers which have holes in the switch tongue.
- Quick and easy usage- just snap it into place and apply padlock.
- Accept lock shackles up to 7 mm in diameter.


Part No	Description
L490B	The length of the rod is 195mm





- The base is made of engineering plastic ABS and the main rod is made of nylon PA.
- The back self-adhesive track can be permanently fixed to the switchboard, simply clean the disk and paste it, without drilling.
- A perfect lockout solution for oversized or irregularly shaped switches.
- Colored bars indicates the switch position. Red bar means the switch is in the off state, green bar means the switch is in the on state.

CIRCUIT BREAKER BLOCKING BAR LOCKOUT

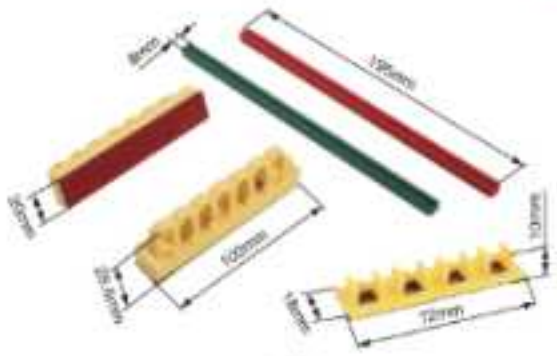

L490B

ELECTRICAL RISK THREE PHASE CIRCUIT BREAKER LOCKOUT



L3824

Part No	Description
L3824	Handle width less than 70mm





- Made from engineering plastic PC material.
- Self-contained screw for easy lockout. Can be easily operated without any tools.
- Multi-lockholes design enables ten workers to lock at the same time.
- Accepts padlock shackles up to 8mm in diameter.
- Product weight: 98 gram

Lototo
Safety Lockout Tagout Indonesia

VALVE LOCKOUT




LOTOTO VALVE LOCKOUT

VALVE LOCKOUT DEVICESS SHUTOFF MANY KINDS OF PRESSURED VALVES INCLUDING : BALL VALVE, BUTTERFLY VALVE, CYLINDER VALVE, GATE VALVE, PLUG VALVE AND PNEUMATIC. ADJUSTABLE, AND UNIVERSAL DEVICES ARE AVAILABLE FOR ADDITIONAL FLEXIBILITY.

Lototo
Safety Lockout Tagout Indonesia

ADJUSTABLE BALL VALVE LOCKOUT

LS3083

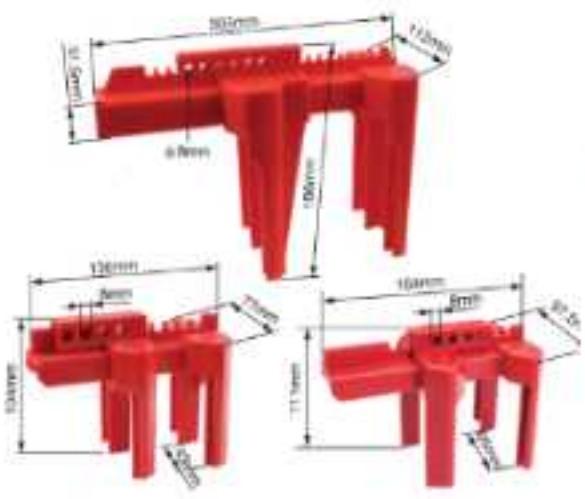

LS3081 LS3082


Part No	Description
LS3081	Suitable for pipes 1/2" to 2.5" in diameter, OPEN on pipes from 1/2" to 1.25"
LS3082	Suitable for pipes 1/2" to 3.15" in diameter, OPEN on pipes from 1/2" to 2.5"
LS3083	Suitable for pipes 2" to 8" in diameter

- Made from durable ABS, withstand temperature from -20°C to +90°C, highly resistant of cracking and abrasion and supports extreme weather temperature conditions.
- The two halves of the lockout encompass the ball valve handle to secure it from inadvertent activation of the valve handle.
- Suggested be equipped together with padlocks with max clamping shackle diameter of 8mm.
- Product weight: LS3081 (140gram), LS3082 (150gram)

ADJUSTABLE BALL VALVE LOCKOUT

Part No	Description
LS3471	Suitable for pipes diameter from 9.5mm (3/8") to 31mm (1 1/5")
LS3472	Suitable for pipes diameter from 9.5mm (3/8") to 31mm (1 1/5"), with front & back foot board
LS3473	Suitable for pipes diameter from 13mm (1/2") to 70mm (2 3/4")
LS3474	Suitable for pipes diameter from 13mm (1/2") to 70mm (2 3/4"), with front & back foot board
LS3475	Suitable for pipes diameter from 73mm (2 4/5") to 215mm (8 1/2")

- Made from durable ABS, withstand temperature from -20°C to +90°C.
- Removable insert accommodates a wide range of handle designs and dimensions.
- It has an auxiliary rear plate, which can lock out double roll valves.

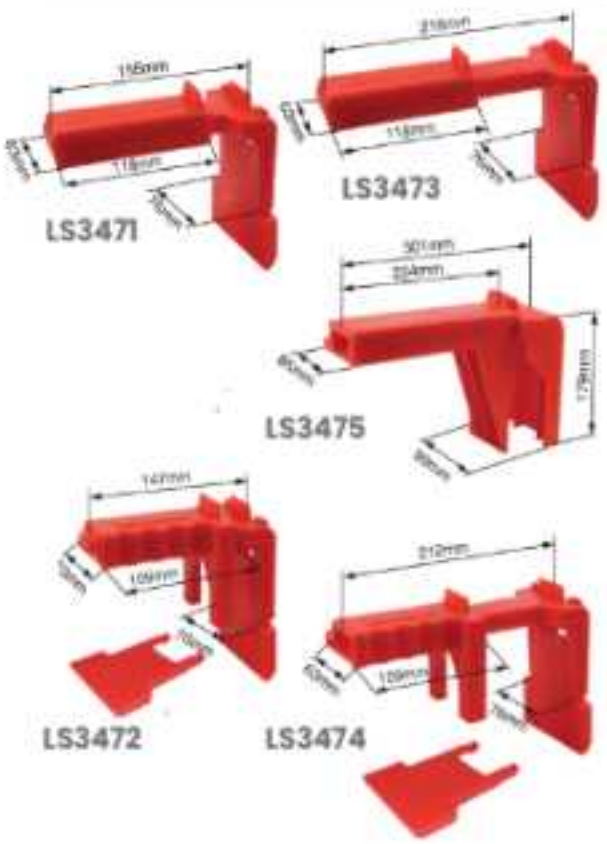

LS3471 LS3473 LS3475 LS3472 LS3474

ADJUSTABLE BALL VALVE LOCKOUT

L4800




Part No	Description
L4800	Suitable for valve handle 1" to 6 1/2" in diameter



- Made from durable ABS, withstand temperature from -20°C to +90°C.
- Can be equipped together with padlocks. Padlock locking shackle max diameter 3/8" (10mm).
- Can be covered and rotated freely around valve wheel, and adjustable to fit a range of valve handles.

Lototo
Safety Lockout Tagout Indonesia

STANDARD BALL VALVE LOCKOUT

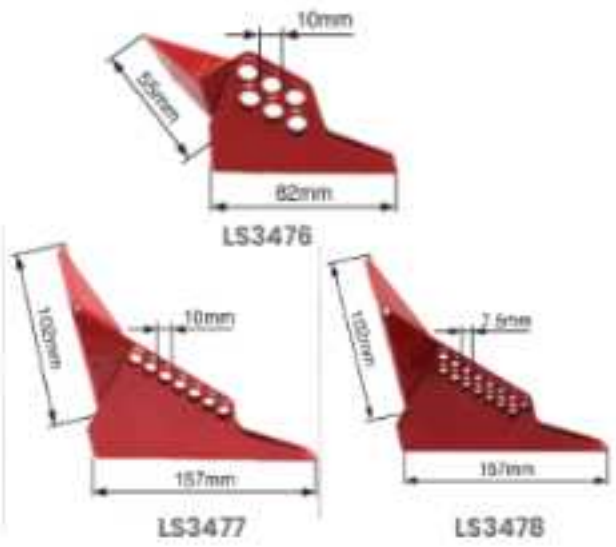

Part No	Description
LS3476	Size: 82mm x 55mm, hole diameter: 10mm
LS3477	Size: 157mm x 102mm, hole diameter: 10mm
LS3478	Size: 157mm x 102mm, hole diameter: 7.5mm



- Made from hardened steel, surface treatment by high temperature spraying, rust proof.
- The single-piece design locks can be quarter-turn ball valves in off position.
- Used on ball valve sizes from 6.35mm (1/4") to 25mm (1"), hole diameter is 3/8".
- Product weight: LS3476 (85 gram)

UNIVERSAL BALL VALVE LOCKOUT

Part No	Description
LS3068	Suitable for valve diameters 6mm (1/4") to 101mm (4") and works on insulated pipes and in close quarters



- Made from zinc alloy, surface treatment by high temperature spraying, rust proof.
- Designed to lock out different types of ball valve, clamp tight on handle stop to prevent handle movement.
- Device encloses the valve stem, with the handle removed, to make accidental reactivation virtually impossible.
- Accept up to 1 padlock, locking shackle max diameter 8mm.
- Can be equipped together with hasps for multiple lockout usage.
- Product weight : 155 gram



STANDARD GATE VALVE LOCKOUT

Part No	Description	A	B	C
LS480	Suitable for valve handle 1" to 2 1/2" in diameter	72	30	19
LS481	Suitable for valve handle 2 1/2" to 5" in diameter	132	37	45
LS482	Suitable for valve handle 5" to 6 1/2" in diameter	174	44	63
LS484	Suitable for valve handle 6 1/2" to 10" in diameter	269	67	89
LS485	Suitable for valve handle 10" to 13" in diameter	355	66	105







- Made from durable ABS, withstand temperature from -20°C to +90°C.
- Once locked, it covers around the hand wheel and prevent the valve wheel from being turned.
- Accept up to 1 padlock, locking shackle max diameter 9.5mm.
- Available in 5 sizes and red color, other color can customized, providing English tag.
- Transparent one can be customized with PC.
- Product weight : LS481 (163 gram)

Lototo
Safety Lockout Tagout Indonesia

STANDARD GATE VALVE LOCKOUT



Part No	Description	A	B	C
L480B	25mm-64mm (1"-2.5")	70	28	18
L481B	64mm-127mm (2.5"-5")	132	36	44
L482B	127mm-165mm (5"-6.5")	172	40	63
L483B	165mm-254mm (6.5"-10")	269	60	88
L484B	254mm-330mm (10"-13")	359	60	105
L485B	330mm-475mm (13"-18)	475	67	105

- Made from engineering plastic nylon ABS.
- Once locked, it covers around the hand wheel and prevent the valve wheel from being turned.
- Accept up to 1 padlock, locking shackle max diameter 9.5mm.

STANDARD GATE VALVE LOCKOUT

Part No	Description	A	B	C	D
L480	Suitable for valve handle 1" to 2 1/2" in diameter	78	29	18	8
L481	Suitable for valve handle 2 1/2" to 5" in diameter	132	40	39	7.5
L482	Suitable for valve handle 5" to 6 1/2" in diameter	170	52	63	7.5
L483	Suitable for valve handle 6 1/2" to 10" in diameter	255	61	85	7.5
L484	Suitable for valve handle 10" to 13" in diameter	360	77	97	8
L485	Suitable for valve handle 13" to 18" in diameter	457	70	123	7.5
L486	Suitable for valve handle 18" to 25" in diameter	645	60	140	7.5





- Made from durable ABS, withstand temperature from -20°C to +90°C.
- Once locked, it covers around the hand wheel and prevent the valve wheel from being turned.
- Two parts design can be combined into one when storing and carrying which reduce the half restore space.
- Accept up to 2 padlock, locking shackle max diameter 7.5mm.
- Available in 5 sizes and red color, other color can customized, providing English tag.



ROTATING GATE VALVE LOCKOUT



Part No	Description	A	B	C	D
L480ML	Applicable stem diameter: 25mm-64mm	77	28	18	8.5
L481ML	Applicable stem diameter: 50mm-127mm	130	38	40	8.5
L482ML	Applicable stem diameter: 101mm-165mm	172	49	65	8.5
L483ML	Applicable stem diameter: 152mm-254mm	257	60	87	8.5
L484ML	Applicable stem diameter: 203mm-330mm	358	70	97	8.5
L485ML	5 size one set				



- Manufactured from ABS, lightweight dielectric thermoplastic.
- Outward/Inward rotation allows for easier installation & storage.
- Surrounds the valve handwheel to protect against accidental operation.
- 5 sizes available, each size nests within the next larger size for easy storage.
- Supplied with "Do Not Operate" warning message.

Lototo
Safety Lockout Tagout Indonesia

UNIVERSAL GATE VALVE LOCKOUT



Part No	Description
LBF04	Max handle width 15mm
LBF04S	Max handle width 28mm
LBF04P	Max handle width 52mm





- Made from industrial grade steel and nylon, withstand temperature from -20°C to 140°C.
- Enable to lock out different types of butterfly valve with the base clamp.
- No other device offers such flexibility and security.
- Designed to handle extra impact and resist chemicals making them ideal for just about any environment.
- Can be matched with different fittings to make a series of universal valves.

Part No	Description
LBF01S	Small lockout for handle width up to 15mm, with 1 arm
LBF01	Handle width up to 24mm, with 1 arm-for quarter-turn ball valves
LBF01P	Large lockout for handle width up to 52mm, with 1 arm
LBF02S	Small lockout for handle width up to 15mm, with 2 arms
LBF02	Handle width up to 24mm, with 2 arm-for 3,4 or 5-way valves, or to lock valves in the "on", "off" or "throttled" position
LBF02P	Large lockout for handle width up to 52mm, with 2 arms
LBF03S	Small lockout for handle width up to 15mm, with coated cable
LBF03	Handle width up to 24mm, with coated cable-for gate valves
LBF03P	Large lockout for handle width up to 52mm, with coated cable
LBF05S	Small lockout for handle width up to 15mm, with 1 arm & coated cable
LBF05	Handle width up to 24mm, with 1 arm & coated cable-universal valve lockout for most valves
LBF05P	Large lockout for handle width up to 52mm, with 1 arm & coated cable

- Made from industrial grade steel and nylon, withstand temperature from -20°C to 140°C.
- Enable to lock out different types and sizes, such as large levers of valves, T-handles and other hard-to-secure mechanical devices.
- No other device offers such flexibility and security.
- Designed to handle extra impact, and resist chemicals making them ideal for just about any environment.

UNIVERSAL GATE VALVE LOCKOUT









BLOCKING ARM



Part No	Description
LBF06S	Size: 137mm (L)
LBF06	Size: 197mm (L)

- Made from industrial grade steel and nylon, withstand temperature from -20°C to 140°C.
- Used with universal valve lockout base.

Lototo
Safety Lockout Tagout Indonesia

BUTTERFLY VALVE LOCKOUT



Part No	Description
LS3921	Suitable for valve handle from 8mm to 45 mm



- Made from ABS, withstand temperature from -20°C to +90°C.
- Good chemical property, resistant to oil stains and chemical product corrosion.
- Can be covered and rotated freely around valve wheels and adjustable to fit all ranges of valve handles.

Part No	Description
LSBV31	Hole diameter: 8mm


- Made of durable ABS plastic.
- Exclusive, anti-pivot lockout device fits the full range of pull handle valve sizes, from 1/2 in. to 8 in. diameter.
- A convenient, one-piece design that stays together whether in use or in storage.
- Holds up to three worker padlocks.
- Effective for all popular pull handle valves commonly used in food and beverage, water utilities, chemical, pharmaceutical and many other industries.
- Secures the valve handle in any desired position, from fully closed, to partially or fully open.
- Product weight : 62 gram

BUTTERFLY VALVE LOCKOUT





ADJUSTABLE BUTTERFLY VALVE LOCKOUT

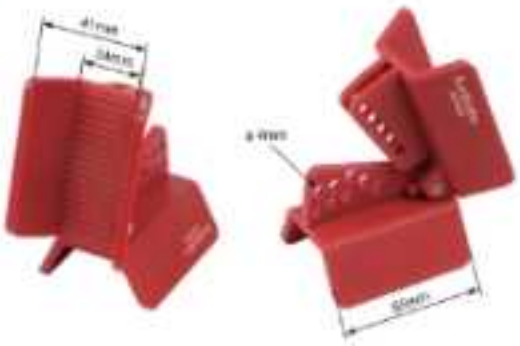

Part No	Description
LS3920	Adjustable angle: 15-36.



- Locks out valve in seconds by feeding NTC01-4 cable lockout device through desired eyelet and around valve neck.
- Made from nylon PA. Durable, lightweight thermoplastic material is chemical resistant and performs effectively in extreme environments.
- Directional application arrows allow for ease of installation and minimize user error.
- Stainless steel rivet allows device to smoothly pivot open and closed to ensure proper fit.
- Product weight : 48 gram

Lototo
Safety Lockout Tagout Indonesia

ADJUSTABLE FLANGED BALL VALVE LOCKOUT



LS4800

Part No	Description
LS4800	Suitable for 6.35mm (1/4") to 140mm (5") flanged ball valves



- Made from ABS, withstand temperature from -20°C to +90°C.
- Accept up to 1 padlock, locking shackle max diameter 8mm.
- Available in red color, other color can be customized, providing english tags.

ADJUSTABLE BALL SAFETY VALVE LOCKOUT

Part No	Description
L468L	Suitable for valve diameter under 22mm (0.87")





- Made from PC, PU, and PVC.
- Easy to carry and operate, use the belt to fix the lockout bag.
- Fine tailoring, smooth surface, excellent workmanship.
- Fits virtually all types of pipe including insulated, PVC and metal.
- Most 4pcs padlocks can lock on at the same time. Suitable for multiple people or work groups.
- Universal fit-effectively locks out all valves from 3/8in (10mm) to 4in (102mm).



L468L

PLUG VALVE LOCKOUT



Measure the diameter of the valve (from A to B) and then choose suitable valve lockout.


Part No	Description
LF41	Suitable for valve diameter under 22mm (0.87") Size: 79x79x84mm
LF42	Suitable for valve diameter from 23mm (0.9") to 34.9mm (1.37") Size: 93x93x98mm
LF43	Suitable for valve diameter from 44mm (1.73") to 53.9mm (2.12") Size: 98x98x105mm
LF44	Suitable for valve diameter from 55mm (2.17") to 63.5mm (2.5") Size: 116x116x112mm



- Four size available, suitable for valve diameter from 25.4mm(1") to 203.2mm(8")
- Durable and vandal resistant.
- Small size, easy to be carried.
- Choose the right plug valve lockout by measuring the size of A and B.

Lototo
Safety Lockout Tagout Indonesia

CUSTOMIZED VALVE LOCKOUT

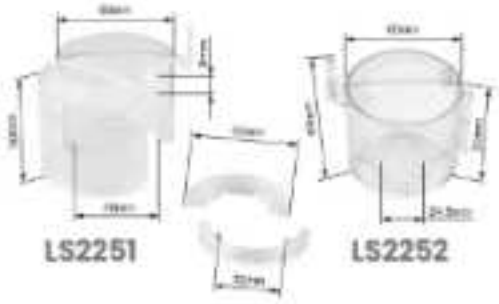

Part No	Description
LS2251	Hole diameter: 32mm, 46mm
LS2252	Hole diameter: 24.5mm





- Made of transparent PC, withstand temperature from -20°C to +120°C.
- Once locked, prevent the valve from being turned.
- The base allows use with two semicircles to accommodate valve.
- Accommodates valve up to 55 diameter and 43mm tall.
- Fits 24.5mm and 32mm-46mm diameter valve.

CUSTOMIZED VALVE LOCKOUT

Part No	Description
LS2253	Hole diameter: 8mm






- Made of transparent PC, withstand temperature from -20°C to +120°C.
- Prevent the valve handles from being turned when locked out.
- Using the two semicircles to accommodate double lock valves.
- Accommodates buttons up to 60mm tall.



CUSTOMIZED VALVE LOCKOUT





Part No	Description
LS2254	Hole diameter 31.9mm x 31.9mm
LS2255	Hole diameter: 40mm x 40mm

- Made of transparent PC, withstand temperature from -20°C to +120°C.
- Prevent the valve handles from being turned when locked out.
- Buckle directly to lock.
- LS2254 can accommodate inner valve up to 65mm diameter and 29mm tall. LS2255 can accommodate inner valve up to 89mm diameter and 49mm tall.
- LS2254 can accommodate outer valve up to 70mm diameter and 33.6 tall. LS2255 can accommodate outer valve up to 91mm diameter and 53 tall.

CUSTOMIZED VALVE LOCKOUT

Part No	Description
LS2256	Hole diameter: 24.5mm
LS2257	Hole diameter: 32mm

- Made of transparent PC, withstand temperature from -20°C to +120°C.
- Once locked, prevent the valve from being turned.
- The base allows use with two semicircles to accommodate valve.
- Accommodates valve up to 55 diameter and 43mm tall.
- Fits 24.5mm and 32mm-46mm diameter valve.



Lototo
Safety Lockout Tagout Indonesia

CABLE LOCKOUT




LOTOTO CABLE LOCKOUT

OUR CABLE LOCKOUT EQUIPMENT IS AN EASY-TO-USE MULTI-PURPOSE ENERGY ISOLATION SOLUTION THAT IS IDEAL FOR UNUSUAL DEVICES THAT ARE DIFICULT TO LOCK USING CONVENTIONAL MEANS. THE DEVICES AND TOOLS AVAILABLE EASILY CINCH CABLE IN PLACE TO KEEP HANDLES AN/OR VALVES LOCKED IN THE OFF POSITION, EFFECTIVELY ISOLATING VALVES OR ELECTRICAL POWER HANDLES. LOCKOUT CABLES ARE AVAILABLE INDIVIDUALLY OR IN LOCKOUT TAGOUT KITS.

Lototo
Safety Lockout Tagout Indonesia

ADJUSTABLE STEEL CABLE LOCKOUT

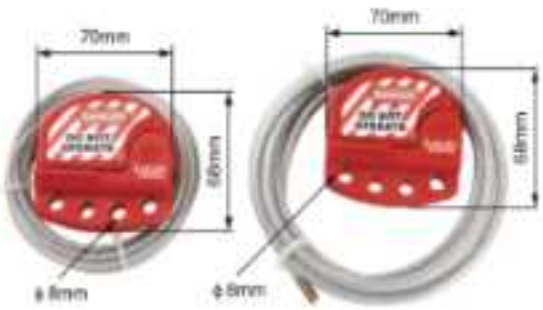

LS806A LS806B

Part No	Description
LS806A	Cable diameter 4mm, length 2m
LS806B	Cable diameter 6mm, length 2m
LS806CBL3	Cable diameter 4mm, length 1m
LS806CBL15	Cable diameter 4mm, length 5m



- Lock body: made of ABS, withstand chemicals.
- Cable: tough, flexible multi-stranded steel cable, with clear plastic coating.
- Cable length can be customized.
- Accepts up to 4 padlocks for multiple for multiple lockout application.
- Includes high-visibility, re-usable, write-on safety labels. Can be customized.
- Ideal for locking out a single valve or multiple side-by-side valves.
- Product Weight: LS806A (144 gram), LS806B (144 gram)

Part No	Description
LS808	Cable diameter: 3.8mm, length 2m





- Made from industrial durable nylon, and insulation coated steel cable.
- Designed to effectively lock out a variety of isulation points, including gate valves, "T" valve handles and other hard-to-secure mechanical devices.
- The handle is designed to operate the device without any tools needed.
- Cable length and color can be customized.
- Accepts up to 8 padlocks for multiple lockout application.
- Product Weight: 101 gram


ADJUSTABLE STEEL CABLE LOCKOUT



LS808

CABLE LOCKOUT

LS807P LS807S

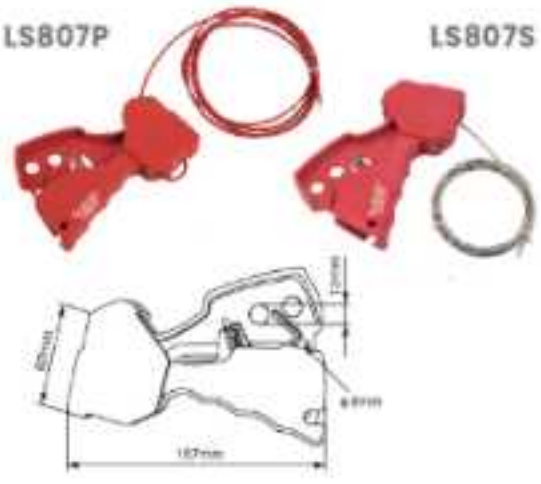

Part No	Description
LS807P	Cable diameter 3.3mm, length 2.4m
LS807S	Cable diameter 3.2mm, stainless steel length 2m





- Lock body: made of glass-filled nylon, withstands chemicals.
- Cable: tough, flexible multi-stranded steel cable, with clear plastic coating.
- Cable length can be customized.
- Accepts up to 1 padlocks to lock out.
- Can be equipped together with hasps for multiple lockout usage.
- Product Weight: LS807S (190 gram)

Lototo
Safety Lockout Tagout Indonesia

CABLE LOCKOUT



LS805A

LS805B


Part No	Description
LS805A	Cable diameter 3.2mm, length 2m
LS805B	Cable diameter 5mm, length 2m

- Made from durable ABS, with insulation coated stainless steel cable.
- Designed to effectively lock out a variety of isulation points, as well as difficult-to-secure mechanical devices.
- Available with interchangeable cables, two cable diameter for your choice: 3.5mm and 5mm.
- Cable length and color can be customized.
- Accepts up to 5 padlocks for multiple lockout application.

CABLE LOCKOUT

Part No	Description
LS810	Cable diameter: 3.8mm, length 2m

- Reinforced nylon PA body, withstand temperature from -20°C to +80°C.
- The cable with clear plastic insulation coating.
- Ergonomic design, pop-up lock, easy to operate.
- Accepts up to 4 workers for multiple lockout application.

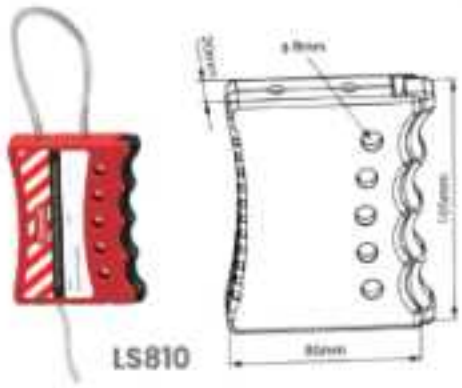

LS810

CABLE LOCKOUT

Part No	Description
LS811	Cable diameter 3.3mm, length 2.4m



LS811




- Made of ABS body withstand chemicals and non-conductive nylon cable attachment.
- Lightweight construction for easy handling, carrying and operation.
- Accepts up to 6 padlocks for multiple energy isolation points.

CABLE LOCKOUT

Part No	Description
LS809	Cable diameter: 1.5mm, length 300mm

- PA body, with insulation coated steel cable.
- Used to lock the device with small lock hole.
- Accepts up to 2 padlocks for multiple lockout application. The lock hold diameter is 8mm and 6mm.
- Cable length and color can be customized.

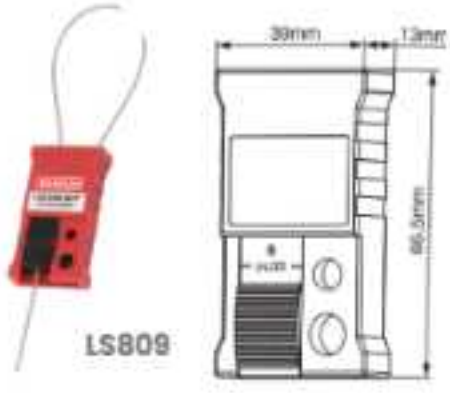

LS809

Lototo
Safety Lockout Tagout Indonesia

ECONOMIC CABLE LOCKOUT



LS801P



LS801S

Part No	Description
LS801P	Cable diameter 3.8mm, length 2m
LS801S	Cable diameter 3.8mm, length 2m





- Made from nylon, with an insulation plastic coated steel cable.
- Non-slip design fits man's hand shape. Very convenient to be used.
- Includes-high-visibility, re-usable, write-on safety labels.
- Cable length and color can be customized.
- Accepts up to 6 padlocks for multiple lockout application.

ECONOMIC CABLE LOCKOUT

Part No	Description
LS802P	Cable diameter: 4mm, length 2m
LS802S	Cable diameter: 4mm, length 2m

- Made from nylon, with an insulation plastic coated steel cable.
- Non-slip design fits man's hand shape. Very convenient to be used.
- Includes-high-visibility, re-usable, write-on safety labels.
- Cable length and color can be customized.
- Accepts up to 8 padlocks for multiple lockout application.



LS802P



LS802S

MULTIPURPOSE CABLE LOCKOUT



LS804P



LS804S

Part No	Description
LS804P	Cable diameter 3mm, length 2m
LS804S	Cable diameter 3mm, length 2m

- Made from impact resistant engineering plastic nylon PA.
- Inner material has two choices: Nylon and Metal (Stainless Steel).
- Product Weight: LS804P (142gram), LS804S (164gram)








Lototo
Safety Lockout Tagout Indonesia

FISH-SHAPED CABLE LOCKOUT



LS800A LS800B

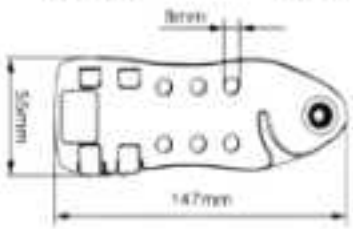

Part No	Description
LS800A	Cable diameter 3.8mm, length 2m
LS800B	Cable diameter 3.7mm, length 2.4m





- Lock body made from ABS, with insulation plastic coated steel cable.
- Includes-high-visibility, re-usable, write-on safety labels. Can be customized.
- Cable length and color can be customized.
- Accepts up to 8 padlocks for multiple lockout application.

AUTO RETRACTABLE CABLE LOCKOUT

Part No	Description
LS803	Cable diameter: 1.5mm, length 2m

- Made from durable ABS, with stainless steel cable stored internally, anti-corrosive and temperature-resistant.
- Push button self-winding mechanism retracts automatically to tightly cinch the cable, leaving no slack.
- Designed to effectively lock out different types of disconnect switches and small gate valves.
- With auto retractable function, it's easy to operate, compact and portable.
- Accepts up to 8 padlocks for multiple lockout application, locking shackle max diameter 8mm.
- Cable length and color can be customized.



LS803



Lototo
Safety Lockout Tagout Indonesia

PNEUMATIC & ELECTRICAL LOCKOUT



LOTOTO PNEUMATIC & ELECTRICAL LOCKOUT

OUR ELECTRICAL LOCKOUT PRODUCT WILL HELP YOU PROPERLY SHUT DOWN ELECTRICAL SYSTEMS INCLUDING : PUSH-BUTTONS, ROTARY, WALL SWITCHES, PLUGS, AND MUCH MORE.

Lototo
Safety Lockout Tagout Indonesia

PNEUMATIC QUICK-DISCONNECT LOCKOUT



Part No	Description
LS01	Fits 12, 13, 16mm screwed joints.




- Made from engineering plastic nylon PA.
- No need to install a straight interlock valve, can be isolated pneumatic power with lower cost and more convenience.
- Hole in the center of the device allows permanent storage on the air hose, and a loop on the side can be used to hang the hose and lockout device.
- Can be equipped with padlocks, lock shackle diameter of 1/4" (6.4mm) or 9/32"(7.1mm).
- Product Weight: 25 gram

Part No	Description
LS02	Suitable for 7-20mm gas source




- Made from 304 stainless steel, corrosion resistance.
- Prevents pneumatic fitting from being connected to pressurized air source.
- Fits virtually all male pneumatic fittings found in manufacturing facilities.
- Measures 1-3/8" wide x 7-3/4" length x 1/8" thick (3.5cm x 19.6cm x 0.3cm).
- Suitable for padlocks, lock shackle diameter ≤ 8.5mm.
- Product Weight: 67 gram

AIR SOURCE LOCKOUT

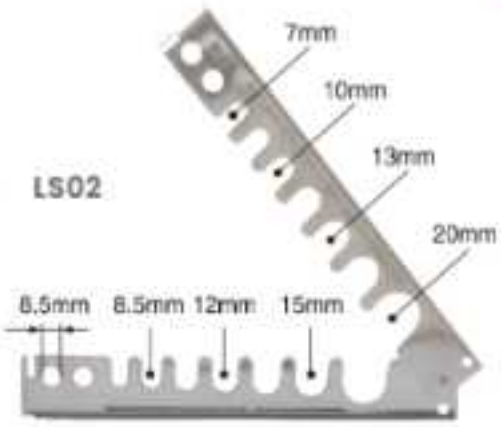

AIR SOURCE LOCKOUT

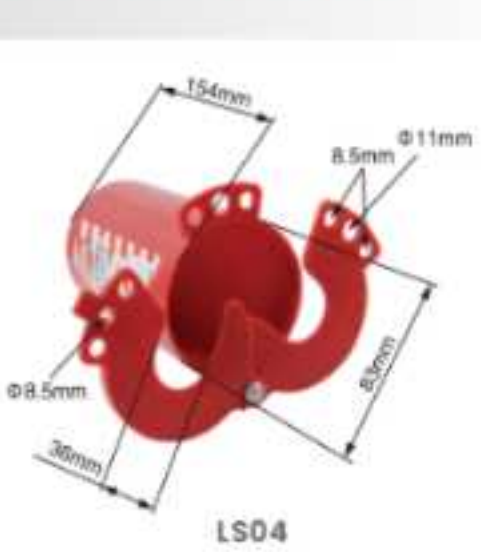

Part No	Description
LS04	The neck rings up to 35mm





- Made from engineering plastic ABS.
- Prevent accesses to the main cylinder valve.
- Accommodates neck rings up to 35mm, and max diameter inside 83mm.
- Easy and efficient installation to save your time.
- Can be locked with 3 padlocks, lock shackle diameter up to 8.5mm.
- Lock with one padlock, lock shackle diameter up to 11mm.
- Product Weight: 160 gram

Lototo
Safety Lockout Tagout Indonesia

CYLINDER TANK LOCKOUT



Part No	A	B	C	Hole Diameter
LS031	92	40	45	9
LS032	81	34	29	8
LS033	83	37	31	8



- Made from durable ABS.
- The whole product is metal-free for superior spark proof and chemical resistance.
- Resistant to cracking and abrasion extreme weather and temperature conditions.
- Can be equipped together with hasps and padlocks.


ELECTRICAL PLUG LOCKOUT

Part No	Description
L487	For 110V plugs
L487L	For 220V plugs
L488	For large 220V/500V plugs



- Made from rugged ABS.
- Prevent plugs from being inserted into the wall outlet, suitable for all kinds of industrial plugs.
- The plug completely sits inside the unit with the cable being fed through an access hole inside.
- Can be locked with 2-4 padlocks, lock shackle diameter up to 7mm.
- Product Weight : L487 (85 gram), L487L (100 gram)

PNEUMATIC PLUG LOCKOUT

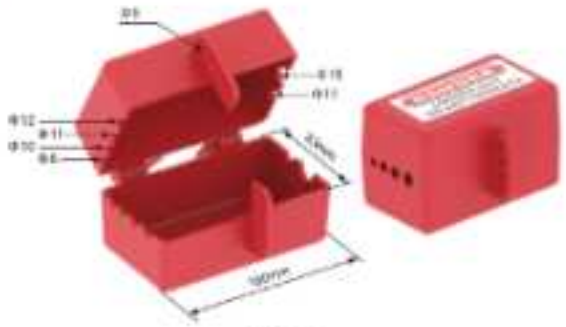

Part No	Description
LP04	Can lock 5 kinds of pneumatic plug, lockout with diameter: 9mm, 10mm, 11mm, 12mm, 20mm.

- Made from durable ABS.
- Several different hole sizes can be applied for a variety of electrical plugs.
- Holes are designed to fit "necked down" pneumatic male fittings commonly attached to compressed air hoses.
- Available for all kinds of electrical and pneumatic plugs.
- Recommended to use in combination wtih a padlock for added safety, up to 4 padlocks with shackle diameter up to 7mm.

Lototo
Safety Lockout Tagout Indonesia

EMERGENCY STOP LOCKOUT



Part No	Description
LB01	Height: 31.6mm; outer diameter: 49.6mm; inner diameter 22mm
LB01M	Height: 31.6mm; outer diameter: 49.6mm; inner diameter 25mm
LB02	Height: 31.6mm; outer diameter: 49.6mm; inner diameter 30mm
TAPE	With tape, final model add T, such as NT-B01T, NT-B01MT, NT-B02T



- Made from durable transparent PC.
- Fits on press or screw emergency stop button.
- Easily used and permanently prevent workers from operating carelessly.
- Fits both 22mm-30mm diameter switches.
- Product Weight: LB01M (19 gram), LB01 (26 gram)

Part No	Description
LS2151	One set, accepts lock shackles up to 8mm in diameter.
LS2151-1	Locking diameter: 22mm
LS2151-2	Locking diameter: 31mm
LS2151-3	3M tape





- Made of transparent PC.
- It prohibits access to a switch or control.
- Horse-show shaped retrofit base can be used on raised nameplates and off-center installation to accommodate rotary switch knobs.
- Accommodates buttons up to 50mm diameter and 45mm tall.
- Fits both 31mm and 22mm diameter switches.
- Product Weight: LS2151 (50 gram), LS2151-1 (4 gram), LS2151-2 (21 gram)

EMERGENCY STOP LOCKOUT



EMERGENCY STOP LOCKOUT



Part No	Description
LB04	Height 36mm, diameter of 22mm



- Made from high strength transparent glass resin PC.
- Install on the controller button forever, avoid accidentally touch.
- LB04 : 24 gram

Lototo
Safety Lockout Tagout Indonesia

SHIP TYPE SWITCH LOCKOUT

Part No	Description
LB04	L 38.5 x W30 x H18mm



LB04



- Rocker Switch Lockout
- Made of transparent PC.
- Prohibits access to a switch or control.
- Prevents workers from operating for a mistake.
- Suit for the rocker switch outer size 23 x 31mm (such as switch model KCD4)
- Product Weight : 24 gram

EMERGENCY STOP LOCKOUT

Part No	Description
LB05	Hole diameter: 22mm
LB06	Hole diameter: 30mm

- Made of transparent PC.
- Prohibits access to a switch or control.
- Fits 31mm - 22mm diameter switches.
- Prevent workers from operating for a mistake



LB05 LB06

EMERGENCY STOP LOCKOUT

Part No	Description
LB07	Hole diameter: 22mm; inner height: 35mm
LB08	Hole diameter: 30mm; inner height: 35mm



LB07



LB08



- Made from durable transparent PC.
- Fits on press or screw emergency stop button.
- Easily used and permanently prevent workers from operating carelessly.
- Fits both 22mm-30mm diameter switches.

EMERGENCY STOP LOCKOUT

Part No	Description
LS2151A	One set, accepts lock shackles up to 8mm in diameter.
LS2151A-2	Locking diameter: 52mm

- Made of transparent PC.
- It prohibits access to a switch or control.
- Horse-show shaped retrofit base can be used on raised nameplates and off-center installation to accommodate rotary switch knobs.
- Accommodates buttons up to 49mm diameter and 46mm tall.
- Fits both 52mm diameter switches.



LS2151A

LS2151A-2

Lototo
Safety Lockout Tagout Indonesia

EMERGENCY STOP LOCKOUT



LB09 LB10

Part No	Description
LB09	Hole diameter: 22.5mm; inner height: 47mm
LB10	Hole diameter: 30mm; inner height: 47mm



- Made from durable transparent PC.
- Fits on press or screw emergency stop button.
- Easily used and permanently prevent workers from operating carelessly.
- Fits both 22.5mm-30mm diameter switches.
- Product Weight: LB09 (31 gram)

SAFETY LOCKOUT BAG

Part No	Description
L453L	450mm (L) x 245mm (W)
L453XL	660mm (L) x 245mm (W)





- Made from flexible and durable fabric.
- Effectively locks out odd size and large electrical connectors and hoist controls.
- Flexible and durable ripstop nylon bag fits easily in safety tool boxes.
- Warning sign can be customized.



MANHOLE LOCKOUT BAG



LS201CS


Part No	Description
LS201CS	Size: 485mm (W) x 420mm (H) Cable lockout need to buy seperately



- Made from wear resisting polyester cloth.
- With 5 meters cable lockout, can lock kinds of manhole.
- Print warning sign on the surface, warning sign can be customized.

Lototo
Safety Lockout Tagout Indonesia

DISCONNECTOR LOCKOUT

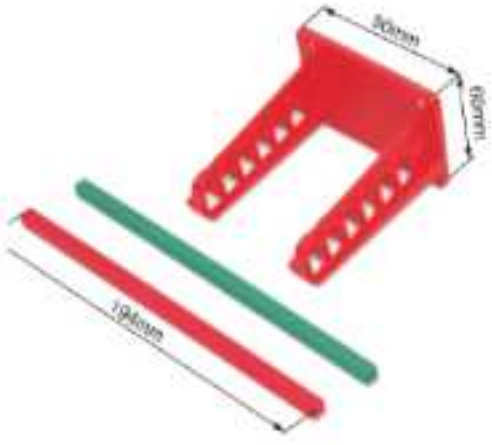

LCL 11

Part No	Description
LCL 11	Suitable for 35-85mm disconnector



- The base is made of engineering plastic ABS and the main rod is made of nylon PA.
- The back self-adhesive track can be permanently fixed to the switchboard, simply clean the disk and paste it, without drilling.
- Lock the 35-85mm height disconnector.
- Colored bars indicates the switch position. Red bar means the switch is in the off state, green bar means the switch is in the on state.

KNIFE SWITCH LOCKOUT

Part No	Description
LL08	Suit for the knife switch handle less 130mm, diameter 15.2mm



- Made of engineering plastic PC.
- It is suitable for the knife switch whose length is less than 130mm, the diameter is 15.2mm, and the base length, width and height are not more than 110mm x 42.5mm x 60mm.


LL08

INDUSTRIAL PLUG LOCKOUT



LLP11


Part No	Description
LLP11	Suitable for 6-125A industrial plugs



- Made from engineering plastic ABS material.
- With a compact, light body, professional for locking most types of industrial plugs.
- Labels can be cutomized.
- Universally used to lock out all sizes of industrial plugs without any tools needed.
- Suggested to be used together with padlocks. Hasps can be used together for multiple usage.
- Product Weight : 7 gram

Lototo
Safety Lockout Tagout Indonesia

WALL SWITCH BUTTON LOCKOUT

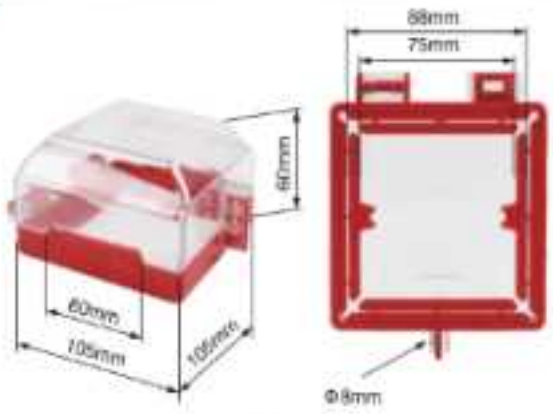

LW12

Part No	Description
LW12	Size of the base: 75mm x 75mm & 88mm x 88mm



- Made from transparent high-strength glass resin PC material.
- Permanently installed on the wall switch or switch and other electrical appliances, you need to open the lock to operate.
- Removable base and side parts. Hole design on both sides, can also lock the plug on the wall, not easy to pull out.
- Can be fixed by tapping screws or 3M double-sided tape.

Part No	Description
LW02	Size: 158mm x 64mm x 98mm

- Made from transparent high-strength glass resin PC material.
- Permanently installed on all kinds of switches and other electrical appliances, you need to open the lock to operate that prevent accidental collision.
- Can be fixed by tapping screws or 3M double-sided tape.
- Product Weight : 170 gram

WALL SWITCH BUTTON LOCKOUT



LW02

WALL SWITCH LOCKOUT


LW04

Part No	Description
LW04	Size: 98mm x 98mm x 55mm

- Made from transparent high-strength glass resin PC material.
- Permanently installed on all kinds of switches and other electrical appliances, you need to open the lock to operate that prevent accidental collision.
- Can be fixed by tapping screws or 3M double-sided tape.

Part No	Description
LW05	Size: 80mm x 80mm x 60mm



- Made from transparent high-strength glass resin PC material.
- Easy to install, just paste it on the switch cabinet.
- Used for chemical industry, power station, steel, workshop and other equipment maintenance safety protection.
- It is suitable for change-over switch or industrial electric switch with external dimension less than 65mm.

WALL SWITCH BUTTON LOCKOUT


LW05

Lototo
Safety Lockout Tagout Indonesia

WALL SWITCH BUTTON LOCKOUT




Part No	Description
LW41	Hole diameter: 26mm (L) x 12mm (W)
LW03	Hole diameter: 27mm (L) x 14mm (W)



- Made from transparent high-strength glass resin PC material.
- Suitable for locking US standard wall switch.
- Easily used and permanently prevent workers from operating carelessly.
- Product Weight : 18 gram

MULTI-FUNCTIONAL INDUSTRIAL ELECTRICAL LOCKOUT

Part No	Description
LX12	Lock knob switch, switch, etc.
LX13	Lock button switches, keyholes of power distribution cabinets, etc.
LX14	Lock cabinet door, electrical handle hole, low voltage drawer cabinet, etc.
LX15	Lock switch cabinet handle, switch, etc.
LX16	Lock switch, handle switch, etc.

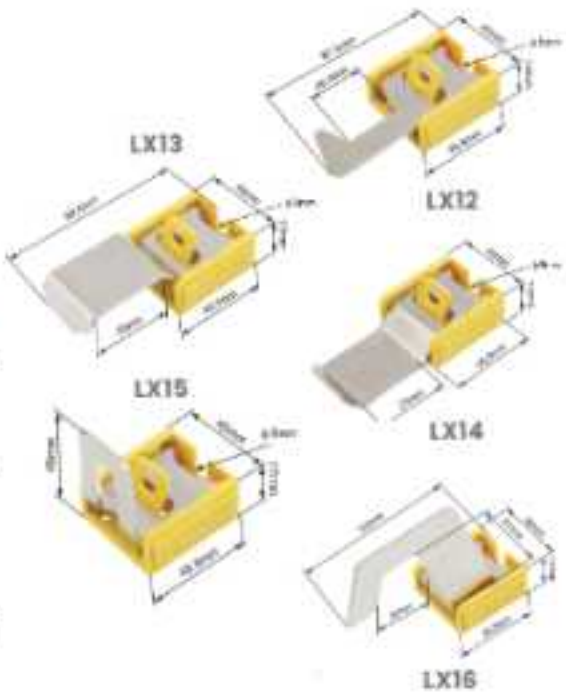



- The lock body is made of ABS and the metal is made of iron chrome.
- Can achieve a variety of non-standard electrical or distribution cabinet lock.
- Can be fixed by screws or 3M double-sided tape.
- Different shapes of locks can be designed according to customer requrements.
- Product Weight : LX14 (63 gram), LX16 (60 gram)

CONTROL PANEL LOCKOUT



Part No	Description
LX65A	Can lock kinds of appliance's touch panel.
LX65B	Can lock kinds of appliance's touch panel.
LX65C	Can lock kinds of appliance's touch panel.
LX65D	Can lock kinds of appliance's touch panel.
LX65F	Can lock kinds of appliance's touch panel.

- Made from acrylic panel.
- With support rack design, can operate the panel conveniently.
- We can fix it by automatic screw or 3M double side-tape.
- It is customized product, the base can be coated steel or transparent mask.
- The default size : 220mm*220mm, height : 45mm.

Lototo
Safety Lockout Tagout Indonesia

SAFETY FLANGE GUARD



CF 20



CF 80



CF 150

Part No	Description
CF 20	Cover Flange Size: 118mm (D) x 50mm (D1) x 94mm (H)
CF 80	Cover Flange Size: 202mm (D) x 130mm (D1) x 105mm (H)
CF 150	Cover Flange Size: 290mm (D) x 180mm (D1) x 110mm (H)

- Made from transparent high-strength glass resin PC material.
- Chemical Resistant
- Resistant to extreme weather
- 650 degree
- Suitable for flange PN16 rating
- Can be use to prevent for leaking
- Customize items based on required size

Lototo
Safety Lockout Tagout Indonesia

LOCKOUT BOX & STATION



LOTOTO LOCKOUT BOX & STATION

GROUP LOCKOUT BOXES ARE A GREAT SOLUTION FOR ISOLATING ENERGY POINTS WHEN A LARGE TEAM IS WORKING. USING A GROUP LOCK BOX ALLOWS YOU TO DRAMATICALLY REDUCE THE AMOUNT OF LOCKS REQUIRED ON A JOB. LIMIT WEIGHT ON EACH ENERGY POINT BY ELIMINATING HASPS, AND PROVIDES A QUICK OVERVIEW OF WHO IS STILL WORKING WITHOUT GOING TO EACH ENERGY POINT.

Lototo
Safety Lockout Tagout Indonesia

PORTABLE GROUP LOCK BOX



L498A

L498B

L498C

Part No	Description
L498A	Size: 227mm (W) x 152mm (H) x 88mm (D), can accommodate 12 padlocks.
L498B	Size: 227mm (W) x 152mm (H) x 88mm (D), can accommodate 13 padlocks.
L498C	Wall Mounted Components for L498A and L498B

- Made from surface high temperature spraying plastic treatment steel plate and stainless steel nylon handle.
- Several people can lock the important parts at the same time.
- Can be used as mini portable lockout box, can accommodate several tagout, hasp, mini lockout etc.
- The label message in English. Other language can be custom made.

GROUP SAFETY LOCKOUT TAGOUT TOOL BOX STATION

Part No	Description
L499A	260mm (W) x 150mm (H) x 110mm (D)
L499B	260mm (W) x 150mm (H) x 108mm (D)

- Made from surface high temperature spraying plastic treatment steel plate and foldable handle.
- Several person can lock the important parts at the same time, can accommodate 12 padlocks.
- Can used as mini portable lockout box, can accommodate several tagout, hasp, mini lockout etc.



L499A

L499B

MANAGEMENT LOCKOUT STATION


L500A

Part No	Description
L500A	360mm (W) x 450mm (H) x 163mm (D)
L500B	480mm (W) x 600mm (H) x 180mm (D)
L500C	600mm (W) x 800mm (H) x 200mm (D)
L500D	600mm (W) x 1000mm (H) x 200mm (D)

- Made from surface high temperature spraying plastic treatment steel plate and foldable handle.
- There are two adjustable separators which can allocate spaces easily.
- The station is multifunctional for all kinds of lockouts, especially for departmental usage.
- Can be customized made non-perspective panel.
- Any size station can be customized.

Lototo
Safety Lockout Tagout Indonesia

METAL PADLOCK STATION

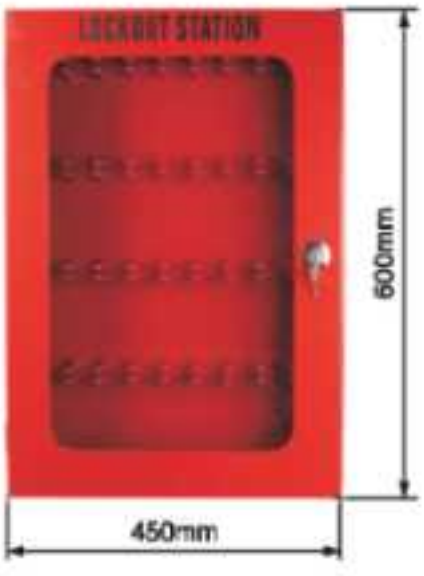

LX07


Part No	Description
LX07	450mm(W) x 600mm(H) x 85mm(D)

- Made from surface high temperature spraying plastics treatment steel plate.
- With 32 padlock positions, each padlock position can hang 2 padlocks or hasps.
- Other size and specification can be customized.


PORTABLE GROUP LOCK BOX

Part No	Description
L501A	Can hold 17pcs padlocks max
L501B	Can hold 32pcs padlocks max

- The Combined Lockout Storage and Group Lockout Box is a handy box which features a lockable storage compartment and a group lockout compartment.
- Made of heavy duty steel, powder coated for extra rust resistance; group lockout compartment has clear PC window with keyhole slot.
- Use one lock on each energy control point and place the keys in the lockout box; each worker then places his own lock on the box to prevent access.
- Each employee retains exclusive control, by placing his own lock on the lockout box containing the keys to the job locks.
- As long as any one worker's iock remains on the lockout box, the keys to the job lacks contained inside cannot be accessed.

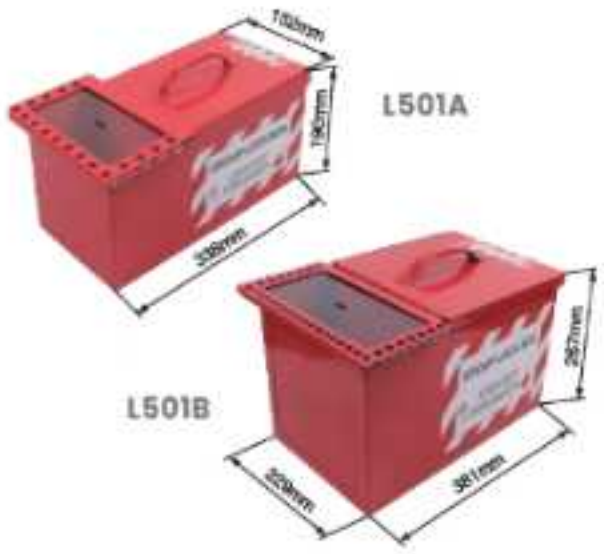

METAL PADLOCK STATION

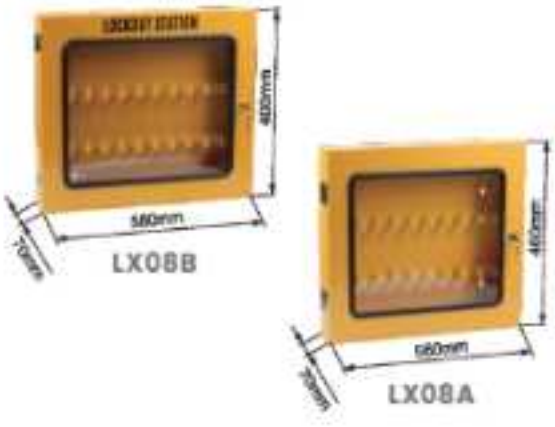

Part No	Description
LX08A	560mm (W) x 460mm (H) x 70mm (D)
LX08B	560mm (W) x 460mm (H) x 70mm (D)

- Made from surface high temperature spraying plastics treatment steel plate.
- With 30 padlock positions, each padlock position can hang 2 padlocks or 2 hasps.
- Lockout management available.
- Can be customized made non-perspective panel.

Lototo
Safety Lockout Tagout Indonesia

LOCKOUT STATION



LX09


Part No	Description
LX09	580mm(W) x 430mm(H) x 90mm(D)

- Made from surface high temperature spraying plastics treatment steel plat.
- With 22 padlock positions, each padlock position can hang 2 padlocks or 2 hasps.
- Lockout management available.
- Can be customized made non-perspective panel.

LOCKOUT STATION


Part No	Description
LK12	10-lock station, 345mm (H) x 345mm (W)
LK13	20-lock station, 595mm (H) x 295mm (W)
LK14	36-lock station, 546mm (H) x 597mm (W)

- Made from bright and durable acrylic with acrylic lock rails.
- Warning label can be customized.
- Can accommodate padlocks, tags, hasps.

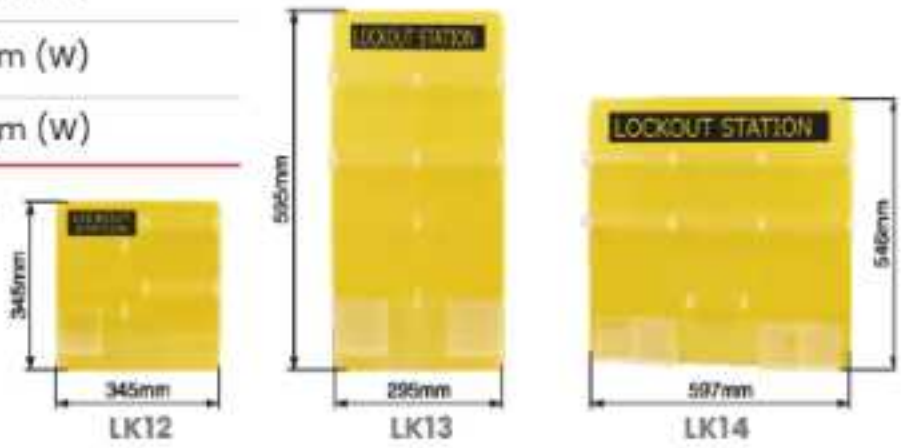

LK12 LK13 LK14

PLASTIC GROUP LOCK BOX

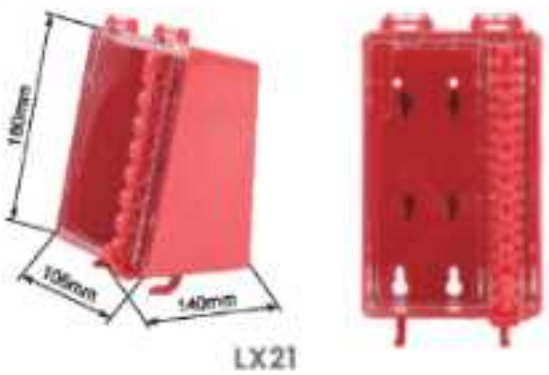

LX21

Part No	Description
LX21	105mm (W) x 180mm (H) x 105mm (D)

- Made of plastic engineering plastic ABS and PC.
- Visible with mask design.
- Can be locked by 8 safety padlocks at the same time, convenient for administration.
- It has 6 hooks inside and 2 hooks outside.

Lototo
Safety Lockout Tagout Indonesia

METAL PADLOCK STATION



LK41

Part No	Description
LK41	480mm(W) x 500mm(H) x 85mm(D)

- Made from surface high temperature spraying plastics treatment steel plat.
- Each padlock position can hang 2 padlocks or 2 hasps.
- Lockout management available.
- Can be customized made non-perspective panel.

GROUP LOCKOUT BOX

Part No	Description
L503RED	165mm (W) x 325mm (H) x 85mm (D)





- Made from surface high temperature spraying plastic treatment steel plate and stainless steel and nylon handle.
- Device design for key store when large scale aquipment shut down.
- Can be used as mini portable lockout box, can accommodate several tagout, hasps, mini lockout, etc.
- Double function: wall mounting type or portable.
- Integrated store space can accommodate 12 padlocks orderly or hundreds of key scatteredly.
- Up to 14 workers can lock it at the same time.
- Other colors can be customized.



L503RED

LOCKOUT STATION







Part No	Description
L1482	410mm (W) x 315mm (H) x 65mm (D)
L1483	565mm (W) x 400mm (H) x 65mm (D)
LS1850	565mm (W) x 400mm (H) x 65mm (D) with holder for small lockout devices

- Made of plastic engineering plastic ABS and PC.
- One piece design, with a cover to lock out.
- Can accommodate padlocks, hasps, lockout tags, and some ties.
- There's a lockable combination padlock hole for locking out as a limit access to unauthorized employees.

Lototo
Safety Lockout Tagout Indonesia

MAINTENANCE LOCKOUT TOOL BOX



LS1020

Part No	Description
LS1017	365mm(W) x 185mm(H) x 140mm(D)
LS1020	410mm(W) x 190mm(H) x 185mm(D)
LS1023	450mm(W) x 245mm(H) x 213mm(D)

- Made of coated iron and engineering plastic PP.
- Warning words can be customized.


COMBINED LOCKOUT STATION

Part No	Description
LS1900	Can accommodate 40 padlocks and mini lockouts.
L1414	Can accommodate 60 padlocks.
L1484	Can accommodate 40 padlocks, 8 hasps, and tags.
L1416	Can accommodate a number of tags and mini lockouts.
L1417	Can accommodate 20 padlocks, and 2 writing boards.
L1418	Can accommodate a number of lockout tags.



- Made of plastic engineering plastic PC.
- One piece design, with a cover to lock out.
- Can accommodate numbers of padlocks, hasp, tagout and mini lockout etc.
- There's a lockable combination padlock hole for locking out as a limit access to unauthorized employees.
- Only lockout station.
- The overall size: 520mm (W) x 631mm (H) x 85mm (D)


***lockout station only, excluding device inside the lockout station.**

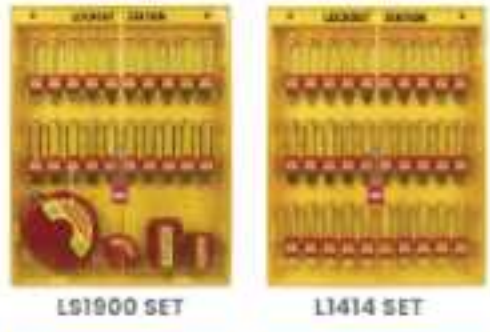

LS1900 SET L1414 SET
L1484 SET L1416 SET
L1417 SET L1418 SET

*Picture for illustration purposes only.

LOCKOUT STATION

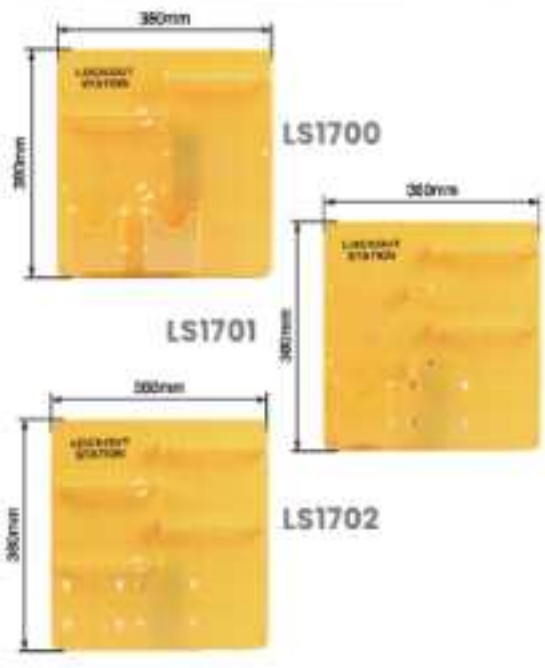

Part No	Description
LS1700	Hold 10-16 padlocks with 2 tag holders.
LS1701	Hold 10-16pcs padlocks, 2 hasps, and 1 tag holders.
LS1702	Hold 20-32pcs padlocks.

- Made from ABS, strong and durable.
- Accessories can be freely matched according to needs.
- Support customize the LOGO.
- The overal size: 380mm (W), x 380mm (H), x 10mm (D).

Lototo
Safety Lockout Tagout Indonesia

METAL PADLOCK STATION



LPS04 LPS03 LPS02 LPS01

Part No	Description
LPS01	140mm(L)x40mm(W)x80mm(H), can accommodate 5 padlocks
LPS02	270mm(L)x40mm(W)x80mm(H), can accommodate 10 padlocks
LPS03	400mm(L)x40mm(W)x80mm(H), can accommodate 15 padlocks
LPS04	530mm(L)x40mm(W)x80mm(H), can accommodate 20 padlocks

- Made from heavy duty steel with durable powder coated finish treatment, which ensures longer life in manufacturing facilities.
- English warning label. Other language can be custom made

LOCKOUT STATION

Part No	Description
L1451	280mm(W) x 400mm(H)
L1452	360mm(W) x 540mm(H)
L1453	660mm(W) x 520mm(H)
L1454	800mm(W) x 650mm(H)
L1455	1220mm(W) x 800mm(H)
L1456	1220mm(W) x 800mm(H)


- Made of plastic engineering plastic PC.
- One piece design, with a cover to lock out.
- Can accommodate numbers of padlocks, hasp, tagout and mini lockout etc.
- There's a lockable combination padlock hole for locking out as a limit access to unauthorized employees.
- The overall size: 520mm (W) x 631mm (H) x 85mm (D)



L1451




L1452




L1453



L1454



L1455



L1456

PORTABLE PADLOCK HANDY

Part No	Description
LS125	Accommodate up to 12 padlocks



LS125






- Made from engineering plastic reinforced nylon molding.
- Can carry up to 12 padlocks at the same time.
- English warning label. Other language can be custom made.

Lototo
Safety Lockout Tagout Indonesia

PORTABLE PADLOCK HANDY

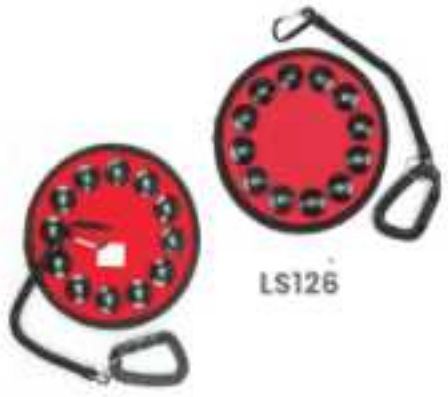

Part No	Description
LS126	Accommodate up to 12 padlocks



- Made from durable industrial oxford fabric.
- Light, flexible devices can be carried on belt, accommodate up to 12 padlocks.
- With plastic spring for holding keys.
- The overall diameter is 183mm, lock hole diameter is 10mm.

SAFETY PORTABLE LOCKOUT BAG

Part No	Description
LLB01YLW	Yellow, 300 x 210 x 230mm
LLB01BLU	Blue, 400 x 240 x 260mm

- Made from durable waterproof nylon fabric.
- Can custom made the sign on the lockout bag surface.
- With easy carrying hand straps and a shoulder strap.



LLB01YLW



LLB01BLU

SAFETY BAG



LLB21



LLB31



LLB41



LLB51

Part No	Description
LLB21	200mm(L) x 130mm(H) x 55mm(W)
LLB31	280mm(L)x 300mm(H) x 80mm(W)
LLB41	240mm(L) x 160mm(H) x 100mm(W)
LLB51	195mm(L) x 115mm(H) x 75mm(W)

- Made from water resisting polyester cloth.
- Light—weight and easy to carry or wear.
- Can customize the sign on the lockout bag surface

KEY TAG

Part No	Description
LKT01	Label inside can be custom made

- Made from PE material, durable using.
- Comes with a writable white paper inside.
- Overal size: 58 x 21mm
- All colors available.



LKT01

Lototo
Safety Lockout Tagout Indonesia

KEY BOX



Part No	Description
LKB24	215mm (W) x 55mm (H) x 325mm (D), 24 key holes
LKB22	270mm (W) x 55mm (H) x 325mm (D), 32 key holes
LKB48	270mm (W) x 55mm (H) x 395mm (D), 48 key holes
LKB72	480mm (W) x 55mm (H) x 395mm (D), 72 key holes
LKB96	640mm (W) x 55mm (H) x 395mm (D), 96 key holes
LKB120	780mm (W) x 55mm (H) x 395mm (D), 120 key holes
LKB150	780mm (W) x 55mm (H) x 443mm (D), 150 key holes
LKB180	885mm (W) x 55mm (H) x 443mm (D), 180 key holes

- Made from aluminum with surface treatment.
- Can hold all kinds of keys, cards etc.
- The lock hook in the cabinet is adjustable.
- Other capacities can be customized.

ERASABLE TAGOUT PEN

Part No	Description
LLP01	200mm(L) x 130mm(H) x 55mm(W)

- Used on the PVC tag.
- Use cloth and paper to erase the script that the pen written.



LLP01

Lototo
Safety Lockout Tagout Indonesia

LOCKOUT TAG



LOTOTO LOCKOUT TAG

LOCKOUT TAGOUT TAGS ARE OSHA COMPLIANT AND COMMUNIATE SAFETY AND LOCKOUT INFORMATION AT THE POINT OF NEED. THESE TAGS COME IN A VARIETY OF MATERIALS TO SUIT YOUR SPECIFIC LOCKOUT/TAGOUT (LOTO) NEEDS. YOU CAN ALSO CREATE YOUR OWN CUSTOM TAG FOR AN APPLICATION SPECIFIC MESSAGE.

Lototo
Safety Lockout Tagout Indonesia

SAFETY WARNING TAG



L497A ENG
Without Plastic Coated



L497AML
With Plastic Coated

Part No	Description
LT01A	75mm(W) x 146mm(H) x 0.5mm(T)
L497A	75mm(W) x 146mm(H) x 0.5mm(T)
L497AML	85mm(W) x 156mm(H) x 0.5mm(T)
LT03A	75mm(W) x 146mm(H) x 0.5mm(T)



- Made from PVC material.
- The tag indicates who is reponsible for placing the lockout device and who is authorized to remove it or make it changes to it.
- Can be written by erasable pen for repeated using.
- Other wording and design can be custom made.
- Can customize with your logo.



LT01A
Equipment Locked
75 x 146mm



L497A IND
Jangan Dioperasikan
75 x 146mm



LT03A
Do Not Operate
75 x 146mm



LT51A
Do Not Operate
76 x 136mm



LT38A
76 x 143mm



LT39A
76 x 143mm



LT03A
Do Not Operate
75 x 135mm



LT51A
Russian
75 x 146mm



LT22A
Information
75 x 146mm



LT05A
Made of polyiefin synthetic paper, wording can be customized
90 x 170mm



LT02ZA
请勿操作
75 x 146mm 中英文



LT02ZAYLW
请勿操作
75 x 146mm 中英文

Lototo
Safety Lockout Tagout Indonesia



LT02ZABLU
请勿操作
75 x 146mm 中英文



LT03ZA
请勿操作
75 x 146mm 中英文



LT04ZA
不准操作
76 x 136mm 中英文



LT04ZA
不准启动，电工正在工作
76 x 136mm



LT022ZA
电气隔离
75 x 146mm 中英文



LT06ZA
不准操作
75 x 145mm 中英文



LT04ZA
参与联锁,请勿操作
60 x 100mm 中英文



LT04ZA
不准操作
50 x 90mm



LT11ZA
不准操作
76 x 136mm 中英文



LT44ZA
禁止合闸有人工作
50 x 90mm 中英文



LT45ZA
禁止合闸有人工作
75 x 145mm 中英文



LT46ZA
禁止合闸，有人工作
68 x 124mm



LT47ZA
禁止合闸有人工作
76 x 137mm 中英文



LT31A
75 x 146mm 中英文



LT32A
75 x 146mm 中英文



LT33A
75 x 146mm 中英文



LT34A
76 x 146mm 中英文



LT35A
75 x 146mm 中英文



LT07ZA
上锁 禁止移除
150 x 125mm

Lototo
Safety Lockout Tagout Indonesia

CUSTOMIZED ID TAG

Part No	Description
LT11A	54mm x 86mm, same as credit card size.

- Made from PVC material.
- You can put any information on the tag, like company name, personal photo, name, contact number or anything else necessary.
- This lockout ID Tag is a very direct way to show the person who is charge and his information.



LT11A
Customize, with photo and name, etc.



LT04A
Customize, with photo and name, etc.



LT37A
146 x 76mm



LT41A
With cover
70 x 140mm



LT42A
With cover
70 x 140mm

SCAFFOLD HOLDER TAG

Part No	Description
LSLT01	Size: 310mm x 92mm, hole diameter: 60mm, 1 tag with 1 holder.
LSLT02	Size: 213mm x 56mm, 1 tag with 1 holder.
LSLT03	Size: 81mm x 39mm.

- Made from ABS.
- Provides systematic, procedural and legal compliance for scaffolds on work sites.
- Provides a clear inspection trail giving integrity and control of work carried out.
- The tags are available in three durable write-on materials, providing highly visual and eye-catching information.
- Each with a scaffold tag holder and a tag. The tags can be customized.



LSLT01 LSLT02 LSLT03

UNIVERSAL GATE VALVE LOCKOUT

Part No	Description
LSLT04	Apply to all valid points.

- Made from ABS.
- Provides systematic, procedural and legal compliance for scaffolds on work sites.
- "Do Not Use Equipment" printed on the front.



LSLT04

Lototo

Safety Lockout Tagout Indonesia

COMPLETE SET



LOTOTO COMPLETE SET

COMPLETE SET ARE EQUIPPED WITH THE TOOLS YOU NEED TO ISOLATE MECHANICAL AND ELECTRICAL CONTROL POINT.

Lototo
Safety Lockout Tagout Indonesia

LOTOTO SAFETY BAG



Part No	Items
LOTOTO Lockout Kit Set LLB51L410	1. LLB51 Qty 1 pcs 2.L410RED Qty 2 pcs 3.L487L Qty 1 pcs 4.L3821 Qty 2 pcs 5.LS2390 Qty 2 pcs 6.LS2391 Qty 2 pcs 7.L3391A Qty 2 pcs 8.L420 Qty 2 pcs 9.L497A ENG Qty 10 pcs

- Can customize other items, and quantity.

Part No	Items	
LOTOTO Complete Set LLB31EL410 (A)	1.LLB31 Qty 1 pcs 2.L410RED Qty 4 pcs 3.L3821 Qty 2 pcs 4.L3822 Qty 1 pcs 5.LS2395 Qty 3 pcs 6.L487 Qty 1 pcs 7.L487L Qty 1 pcs 8.L428 Qty 1 pcs 9.L420 Qty 1 pcs 10.L421 Qty 1 pcs	11. L497A ENG Qty 10 pcs 12. LL901 (PEN) Qty 1 pcs

- Can customize other items, and quantity.

LOTOTO SAFETY BAG



LOTOTO SAFETY BAG



Part No	Items
LOTOTO Complete Set LLB31EL410 (B)	1. LLB31 Qty 1 pcs 2. L410RED Qty 2 pcs 3. L481 Qty 1 pcs 4. L420 Qty 1 pcs 5. LS806A Qty 1 pcs 6. L491B Qty 1 pcs 7. L493B Qty 2 pcs 8. L497A ENG Qty 10 pcs

- Can customize other items, and quantity.

Part No	Items	
LOTOTO Complete Set LLB31EL410 (C)	1. LLB31 Qty 1 pcs 2. L410RED Qty 6 pcs 3. LS410RED Qty 2 pcs 4. L420 Qty 1 pcs 5. LS806A Qty 1 pcs 6. L487 Qty 1 pcs 7. L488 Qty 1 pcs 8. L480 Qty 1 pcs 9. L481 Qty 1 pcs 10. L482 Qty 1 pcs	11. L491B Qty 2 pcs 12. L493B Qty 7 pcs 13. LS3068 Qty 1 pcs 14. LW41 Qty 2 pcs 15. L468L Qty 1 pcs 16. L497A ENG Qty 10 pcs

- Can customize other items, and quantity.

LOTOTO SAFETY BAG



Lototo
Safety Lockout Tagout Indonesia

LOTOTO SAFETY BAG



Part No	Items
LOTOTO Complete Set LLB21L410	1.LLB21RED Qty 1 pcs 2.L410RED Qty 2 pcs 3.L420 Qty 1 pcs 4.L421 Qty 1 pcs 5.L3822 Qty 1 pcs 6.L3821 Qty 1 pcs 7.LS2395 Qty 1 pcs 8.L3821 -2 Qty 1 pcs 9.L3822 -2 Qty 1 pcs 10.LT51A Qty 10 pcs

- Can customize other items, and quantity.

LOTOTO LOCKOUT STATION

Part No	Items
LOTOTO Complete Set L1482BPL410	1.L1482 Qty 1 pcs 2.L410RED Qty 4 pcs 3.L420 Qty 2 pcs 4.L497A ENG Qty 10 pcs

- Can customize other items, and quantity.



LOTOTO LOCKOUT STATION



Part No	Items
LOTOTO Complete Set L1483BPL410	1. L1483 Qty 1 pcs 2. L410RED Qty 10 pcs 3. L420 Qty 2 pcs 4. L421 Qty 2 pcs 5. L497A ENG Qty 2 pack/20 pcs

- Can customize other items, and quantity.

LOTOTO LOCKOUT STATION

Part No	Items	
LOTOTO Complete Set LS1900VE410	1. LS1850 Qty 1 pcs 2. LS1800 Qty 1 pcs 3. L410RED Qty 6 pcs 4. L427ML Qty 1 pcs 5. L420 Qty 1 pcs 6. L482 Qty 1 pcs 7. LF42 Qty 1 pcs 8. LS806A Qty 1 pcs 9. LW41 Qty 1 pcs 10. LS3068 Qty 1 pcs	11. L497A ENG Qty 1 pack

- Can customize other items, and quantity.



Lototo
Safety Lockout Tagout Indonesia

LOTOTO LOCKOUT STATION



Part No	Items
LOTOTO Complete Set LS1850VEL410	1. LS1850 Qty 1 pcs 2. L410RED Qty 3 pcs 3. L406RED Qty 3 pcs 4. LS3081 Qty 2 pcs 5. L420 Qty 2 pcs 6. L3821 Qty 1 pcs 7. L3822 Qty 1 pcs 8. L3823 Qty 1 pcs 9. L483 Qty 1 pcs 10. L481 Qty 1 pcs 11. LS2394 Qty 1 pcs 12. LS806A Qty 1 pcs 13. L497A IND Qty 10 pcs

- Can customize other items, and quantity.

LOTOTO LOCKOUT STATION

Part No	Items
LOTOTO Complete Set L1417BL410	1. L1417 Qty 1 pcs 2. L410RED Qty 20 pcs 3. Clipboard 2 pcs

- Can customize other items, and quantity.



LOTOTO SAFETY LOCKOUT BOX



Part No	Items
LOTOTO Complete Set LS1017VEL410	1. LS1017 Qty 1 pcs 2. L410RED Qty 4 pcs 3. L4800 Qty 1 pcs 4. LS3081 Qty 1 pcs 5. L487L Qty 1 pcs 6. L488 Qty 1 pcs 7. L3822 Qty 2 pcs 8. LS2390 Qty 2 pcs 9. LS2391 Qty 2 pcs 10. LS3391A Qty 2 pcs 11. L491B Qty 1 pcs 12. L493B Qty 1 pcs 13. L420 Qty 2 pcs 14. L421 Qty 2 pcs 15. LS806A Qty 1 pcs 16. L497A ENG Qty 10 pcs

- Can customize other items, and quantity.

Part No	Items
LOTOTO Complete Set LS1020VEL410	1. LS1020 Qty 1 pcs 2. L410RED Qty 4 pcs 3. LS3081 Qty 1 pcs 4. L4800 Qty 1 pcs 5. L487 Qty 1 pcs 6. L488 Qty 1 pcs 7. LS806A Qty 1 pcs 8. L3391A Qty 2 pcs 9. L491B Qty 1 pcs 10. L493B Qty 1 pcs 11. L3822 Qty 2 pcs 12. LS2390 Qty 2 pcs 13. LS2391 Qty 2 pcs 14. L420 Qty 2 pcs 15. L421 Qty 2 pcs 16. L428 Qty 2 pcs 17. L497A ENG Qty 20pcs

- Can customize other items, and quantity.

LOTOTO SAFETY LOCKOUT BOX



Lototo
Safety Lockout Tagout Indonesia

LOTOTO LOCKOUT STATION



Part No	Items
LOTOTO Complete Set LS1023VEL410	1. LS1023 Qty 1 pcs 2. L410RED Qty 4 pcs 3. LS3081 Qty 1 pcs 4. L4800 Qty 1 pcs 5. L487 Qty 1 pcs 6. L488 Qty 1 pcs 7. LS806A Qty 1 pcs 8. L3391A Qty 2 pcs 9. L491B Qty 1 pcs 10. L493B Qty 1 pcs 11. L3822 Qty 2 pcs 12. LS2390 Qty 2 pcs 13. LS2391 Qty 2 pcs 14. L420 Qty 2 pcs 15. L421 Qty 2 pcs 16. L428 Qty 2 pcs 17. L497A ENG Qty 20 pcs

- Can customize other items, and quantity.

Part No	Items
LOTOTO Complete Set LK12	1. LK12 Qty 1 pcs 2. L420 Qty 2 pcs 3. L410RED Qty 10 pcs 4. LT51A Qty 10 pcs

- Can customize other items, and quantity.

LOTOTO LOCKOUT STATION



LOTOTO SAFETY LOCKOUT BOX



Part No	Items
LOTOTO Complete Set LX09BPL410	1. LX09 Qty 1 pcs 2. L410RED Qty 10 pcs 3. L420 Qty 1 pcs 4. L421 Qty 1 pcs 5. L497A ENG Qty 20 pcs 6. L497C Qty 20 pcs

- Can customize other items, and quantity.

Part No	Items
LOTOTO Complete Set L500AVEL410	1. L500A Qty 1 pcs 2. L410RED Qty 4 pcs 3. L480 Qty 1 pcs 4. L481 Qty 1 pcs 5. LS3477 Qty 1 pcs 6. LS01 Qty 1 pcs 7. LW41 Qty 1 pcs 8. L3821 Qty 2 pcs 9. L3822 Qty 1 pcs 10. LS2395 Qty 2 pcs 11. L487 Qty 1 pcs 12. L488 Qty 1 pcs 13. L492B Qty 2 pcs 14. L420 Qty 2 pcs 15. L421 Qty 1 pcs 16. L497A ENG Qty 10 pcs

- Can customize other items, and quantity.

LOTOTO SAFETY LOCKOUT BOX



Lototo
Safety Lockout Tagout Indonesia

LOTOTO
SAFETY LOCKOUT BOX



Part No	Items
LOTOTO Complete Set **LS1017VE410KA**	1. LS1017 Qty 1 pcs 2. L410KARED Qty 3 pcs 3. L480 Qty 1 pcs 4. L481 Qty 1 pcs 5. L482 Qty 1 pcs 6. L491B Qty 2 pcs 7. L493B Qty 3 pcs 8. LS806A Qty 1 pcs 9. L468L Qty 1 pcs 10. LS3068 Qty 1 pcs 11. LW41 Qty 1 pcs 12. LS410RED Qty 1 pcs 13. L420 Qty 1 pcs 14. L427 Qty 1 pcs 15. L497A ENG Qty 1 pack

- Can customize other items, and quantity.

Lototo
Safety Lockout Tagout Indonesia

LOTO MODELLING & DOJO BOARD



LOTO MODELLING & DOJO BOARD

LOTO MODELLING & DOJO BOARD INCLUDE LOTOTO SAFETY LOCKOUT TAGOUT DEVICE.

Lototo
Safety Lockout Tagout Indonesia

LOTO MODELLING



AVAILABLE ON 2 SIZES

TYPE : LM001
DIM : 60CM X 170CM

TYPE : LM002
DIM : 60CM X 140CM

SPECIFICATION:

- **FRAME : HOLLOW STEEL 40X40 MM T:1.2MM GOOD FINISH**
- **BASKET : PERFORATED PLATE, T = 1MM, ADJUSTABLE, GOOD FINISH**
- **PEGBOARD : MATERIAL COLD ROLLED STEEL 1MM, FINISHING STROVING VANISH**
- **INCLUDE ELECTRICAL & MECHANICAL APPLICATION**
- **INCLUDE DEVICE SAFETY LOCKOUT TAGOUT (ELECTRICAL & MECHANICAL)**

Lototo
Safety Lockout Tagout Indonesia

LOTO MODELLING



TYPE : LM003 (DESKTOP VERTIKAL)
DIM : 65CM X 50CM X 90CM


SPECIFICATION:

MECHANICAL APPLICATION:
- Ball Valve
- Gate Valve

ELECTRICAL APPLICATION:
- MCB
- Isolator Switch Control
- Emergency Push Button
- Switch Button ON/OFF
- Electrical Socket 3 Phase

*IMAGE IS FOR ILLUSTRATIVE PURPOSE ONLY
*ALL APPLICATION INCLUDE LOTOTO DEVICE (DEVICE, PADLOCK & TAGGING)

LOTO MODELLING

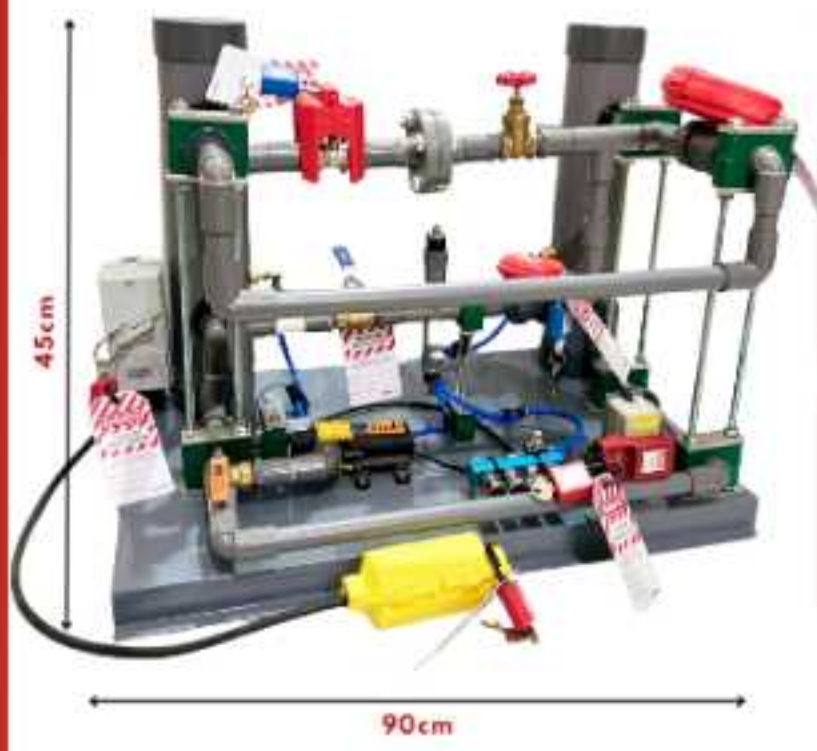

TYPE : LM004 (DESKTOP)
DIM : 90CM X 45CM X 90CM

SPECIFICATION:

MECHANICAL APPLICATION:
- Ball Valve
- Gate Valve
- Pneumatic Valve

ELECTRICAL APPLICATION:
- MCB
- Isolator Switch Control
- Switch Button ON/OFF
- Electrical Socket 3 Phase

*ALL APPLICATION INCLUDE LOTOTO DEVICE (DEVICE, PADLOCK & TAGGING)

Lototo
Safety Lockout Tagout Indonesia

LOTOTO DOJO BOARD
LOCKOUT TAGOUT SYSTEM



TYPE : LDB001
DIM : 150CM X 95CM

SPECIFICATION:

- COVERED WITH 2MM THICK ACRYLIC
- INCLUDE DEVICE SAFETY LOCKOUT TAGOUT (ELECTRICAL & MECHANICAL)

*IMAGE IS FOR ILLUSTRATIVE PURPOSE ONLY
*WALL MOUNTED

Lototo

Safety Lockout Tagout Indonesia

SCAN BARCODE BELOW

MORE INFORMATION
VISIT OUR WEBSITE
& FOLLOW OUR SOCIAL MEDIA